

.

A Csound Tutorial

Michael Gogins
gogins@pipeline.com

February 5, 2008

Contents

1	Introduction	1
2	Getting Started	3
2.1	On Windows	3
2.1.1	Obtaining Csound	3
2.1.2	Installing Csound	4
2.1.3	Configuring Csound	9
2.1.4	OpenGL Rendering	10
2.1.5	Real-Time MIDI Performance	17
2.2	On Linux	20
2.3	On Apple	20
3	Writing Orchestras and Scores	21
3.1	Signal Flow Graphs	21
3.2	How Csound Works	22
3.2.1	Csound Files	22
3.2.2	Performance Loop	23
3.3	Writing Your First Piece	24
3.3.1	Simple Sine Wave	26
3.3.2	Simple Sine Wave, De-Clicked	28
3.3.3	Simple Sine Wave, De-Clicked, ADSR Envelope	29
3.3.4	Frequency Modulation, De-Clicked, ADSR Envelope	29
3.3.5	Frequency Modulation, De-Clicked, ADSR Envelope, Time-Varying Modulation	30
3.3.6	Frequency Modulation, De-Clicked, ADSR Envelope, Time-Varying Modulation, Stereo Phasing	31
3.3.7	MIDI Performance	31
4	Using CsoundVST	35
4.1	Configuring CsoundVST	35
4.2	Using CsoundVST	36
4.2.1	Create a Cubase Song	38
4.2.2	Create an Instance of CsoundVST	38
4.2.3	Load a Csound Orchestra	40
4.2.4	Configure the Orchestra for VST	40
4.2.5	Compile the Orchestra	41
4.2.6	Track Setup	42

Contents

4.2.7	MIDI Channel Setup	42
4.2.8	Write Some Music	43
5	Python Scripting	45
5.1	Running Csound from Python	46
5.2	Generating a Score	47
5.3	Varying the Parameters	50
A	Extra Features and Their Requirements	51
B	Helper Applications	53
B.1	Audio Editors	53
B.1.1	Audacity	53
B.2	Text Editors	53
B.2.1	Emacs	53
B.2.2	SciTE	53
B.3	Composing Environments	53
B.3.1	athenaCL	54
B.3.2	Blue	54
B.3.3	CsoundVST	54
B.3.4	Common Music	54
B.3.5	Pure Data	54
B.4	Programming Languages	54
B.4.1	C/C++	54
B.4.2	Java	55
B.4.3	Lisp	55
B.4.4	Lua	55
B.4.5	Python	55
C	Audio Quality	57

List of Figures

2.1	Download Page	3
2.2	Windows Installer	5
2.3	Csound License	5
2.4	Csound Location	6
2.5	Csound Menu Location	6
2.6	Csound Installing	7
2.7	Installation Completed	7
2.8	Csound Start Menu	8
2.9	Csound GUI	8
2.10	Configuring csound5gui	11
2.11	Windows Console	12
2.12	Command-Line Rendering	14
2.13	General Options	15
2.14	GUI Rendering	16
2.15	Playing Output Sound file	17
2.16	Available Interfaces	19
2.17	MIDI Performance	20
3.1	tutorial2.csd	28
3.2	Playing tutorial2.csd Live	33
4.1	Importing CsoundVST	35
4.2	CsoundVST Plugin Path	36
4.3	CsoundVST Loaded	37
4.4	Creating a New Project	38
4.5	Creating a New Track	39
4.6	Creating a New Instance of CsoundVST	39
4.7	Loading an Orchestra	40
4.8	Compiled Orchestra	42
4.9	Channel Setup	43
4.10	Scoring with Csound	44
5.1	Running Csound with Python in Idle	48
5.2	Running Csound with Python in SciTE	50

List of Figures

1 Introduction

In the words of its author, Barry Vercoe, Csound [1] is a sound processing language. Technically speaking, Csound is a general-purpose, user-programmable software synthesis system (SWSS). Like most SWSS, Csound uses Max Mathews' original 1957 unit generator design [2]. However, Csound was the first SWSS to be written in the C programming language [3]. Being written in C, which is the most efficient and most portable high-level language, and also very widely used, has ensured Csound's survival and growth.

Vercoe wrote Csound at the Massachusetts Institute of Technology in 1984. Ever since then, Csound has received contributions from researchers, programmers, and musicians all over the world. Csound runs on Unix, Linux, Windows, the Macintosh, and other operating systems. Csound can be extended by writing plugin unit generators, and Csound itself runs as a VST plugin. Csound can be programmed in C, C++, Java, Lisp, Lua, and Python. Csound is taught in a number of leading universities and conservatories. Books have been written on how to use it [4, 5, 6]. Csound can be compiled to use double-precision floating point audio samples for the highest sound quality.

In short, Csound must be considered one of the most powerful musical instruments ever created.

Csound is, perhaps, harder to use than such competing programmable synthesizers as SuperCollider [7], Max [8], or Reaktor [9]. One difficulty is that Csound was written a generation ago as a Unix application, and is controlled by dozens of arcane command-line options (although, precisely because it is older, Csound runs faster and has more unit generators). Another difficulty is that Csound lacks some convenient features of other high-level programming languages.

Still, once you learn a few things, Csound is not really so hard to use. The sound processing language turns out to be simple, the documentation is not so bad, Csound always tries to tell you what it is doing (or why it is not doing what you told it)... and the power begins to unfold.

The purpose of this tutorial is to teach you those often neglected first few things. There are three introductory sections, one each for Windows (Section 2.1), Linux (Section 2.2), and Apple computers (Section 2.3), that lead you, step by step, through obtaining, installing, configuring, and running Csound (also see the Csound Reference Manual [10]). Then follow chapters on writing your own orchestras and scores (Chapter 3), using CsoundVST as a VST plugin in a studio sequencer (Chapter 4), and writing Python scripts to do algorithmic composition using the Csound application programming interface (API) (Chapter 5). Finally, there is a list of software required to use the extra features of Csound (Appendix A), a list of other helper applications and languages for Csound (Appendix B), and some advice on how to achieve good sound quality with Csound (Appendix C).

1 Introduction

2 Getting Started

This chapter contains the same information how to obtain, install, configure, and run Csound repeated for each of the main personal computer operating systems in use today: Windows, Linux, and Macintosh OS X.

2.1 On Windows

2.1.1 Obtaining Csound

Go to <http://csound.sourceforge.net/> using your Web browser. Click on the Main Download page link on that page. On the download page, click on the link to the csound5 package. You will see a list of releases. At the time this was written, the most recent downloadable version of Csound for Windows is 5.03. You will see a csound5.03 link on the page. Click on that, and it will expand to show two programs: **Csound5.03-win32-d.exe** and **Csound5.03-win32-f.exe**. Both of these programs are Windows installers for Csound 5.03 (Figure 2.1). For later versions and releases, substitute the actual version number for 5.03 in the links and filenames.

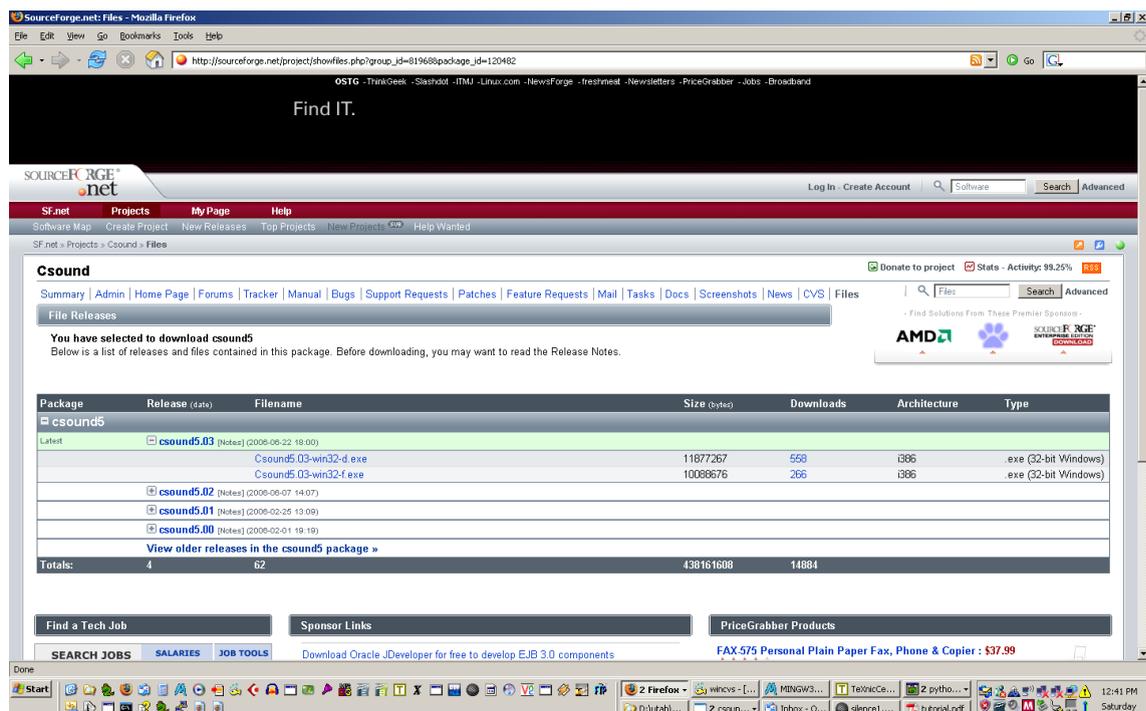


Figure 2.1: Download Page

2 Getting Started

Csound5.03-win32-f.exe installs a version of Csound that has been compiled to use 32-bit floating point numbers internally to represent audio samples. As a result, it runs about 15% faster than **Csound5.03-win32-d.exe**.

Csound5.03-win32-d.exe installs a more complete version of Csound, which has been compiled to use 64-bit floating point numbers for audio samples, and which includes opcodes for making instruments based on Perry Cook's Synthesis Toolkit in C++ [11], and for using Kelly Fitz and Lippold Haken's Loris system for doing sound modeling, morphing, and manipulation using the Reassigned Bandwidth-Enhanced Additive Sound Model [12]. Also, **Csound5.03-win32-d.exe** is a slightly more accurate synthesizer than **Csound5.03-win32-f.exe** [13].

If you are putting on live shows using Csound with complex instruments, and need extra efficiency, download **Csound5.03-win32-f.exe**. Otherwise, you will be better off with **Csound5.03-win32-d.exe**. The rest of this tutorial assumes you have chosen **Csound5.03-win32-d.exe**.

Click on the link to **Csound5.03-win32-d.exe**. Your Web browser should now take you to a Web page listing mirrors from which you may download the installer. Click on the link to a mirror, and your browser should automatically begin to download the file to your computer's hard disk. Make a note of where the download has been saved on your hard disk.

2.1.2 Installing Csound

Csound5.03-win32-d.exe comes with a number of extra features that require other software to work. These extras and their requirements are listed in Appendix A. Please note: if you do not install any of this other software, the standard features of Csound will still work!

To install Csound, simply run the installer program. It will display a dialog box (Figure 2.2).

Click on the Next > button to proceed. You should now see the Csound license agreement (Figure 2.3). You must click on the I Agree button to indicate your acceptance of the Csound license before you can install Csound.

Tell the installer where to put Csound. Although the default location is the standard Windows **Program Files** directory, Csound may actually work better if you install it in a directory without any spaces in the pathname, such as **C:/Csound** (Figure 2.4).

Tell Csound where to put the Windows Start Menu folder for Csound. You can skip this step if you want, but I recommend that you accept the default location (Figure 2.5).

Click on the Install button. The installer will now unpack and install Csound in your selected location (Figure 2.6). When the installer has finished, you should see the message shown in Figure 2.7.

Once Csound has been installed, open the Windows Start Menu, where you should find a Csound submenu containing various Csound programs and documentation (Figure 2.8).

Try running **csound5gui**, which is a relatively user-friendly front end for Csound with a basic graphical user interface (Figure 2.9).



Figure 2.2: Windows Installer

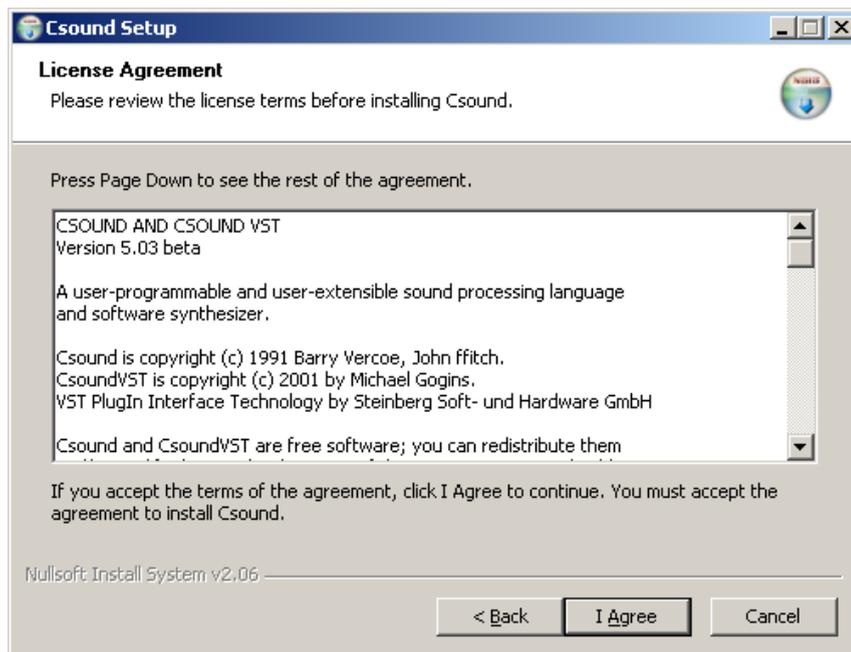


Figure 2.3: Csound License

2 Getting Started

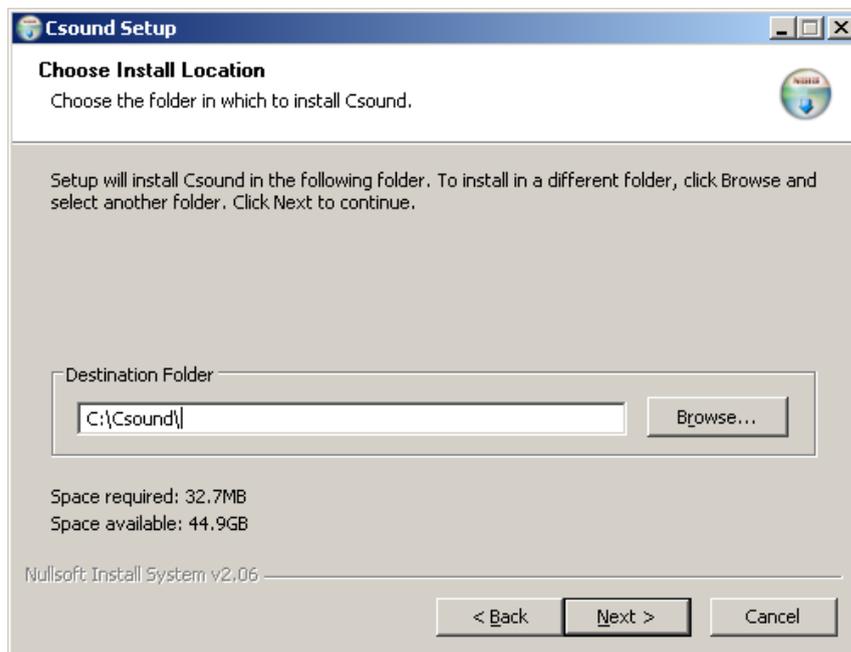


Figure 2.4: Csound Location

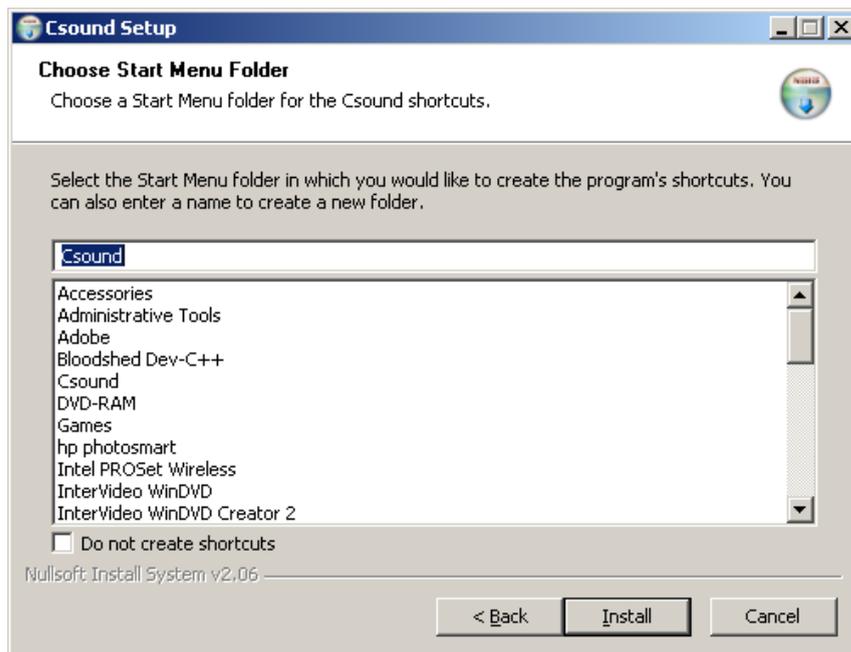


Figure 2.5: Csound Menu Location

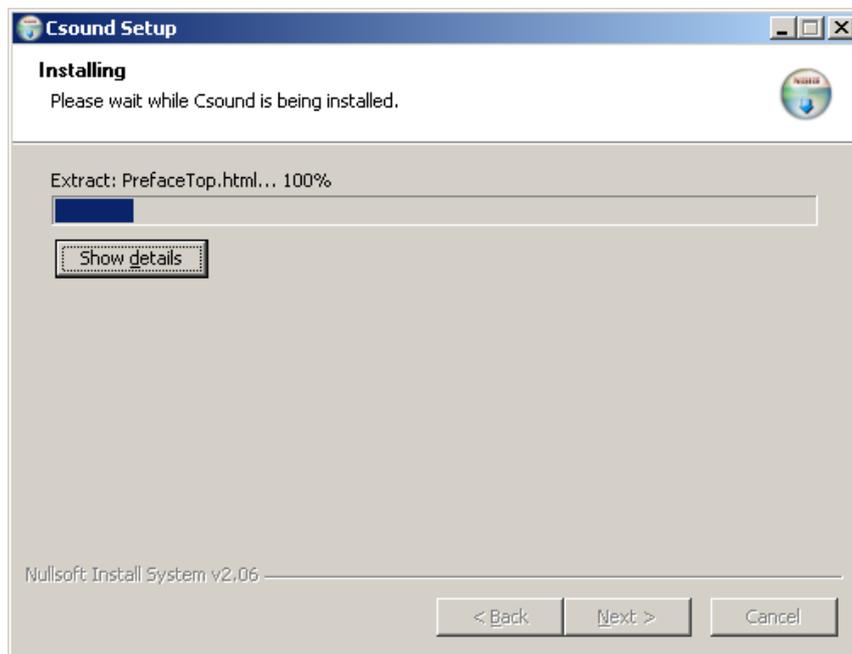


Figure 2.6: Csound Installing



Figure 2.7: Installation Completed

2 Getting Started

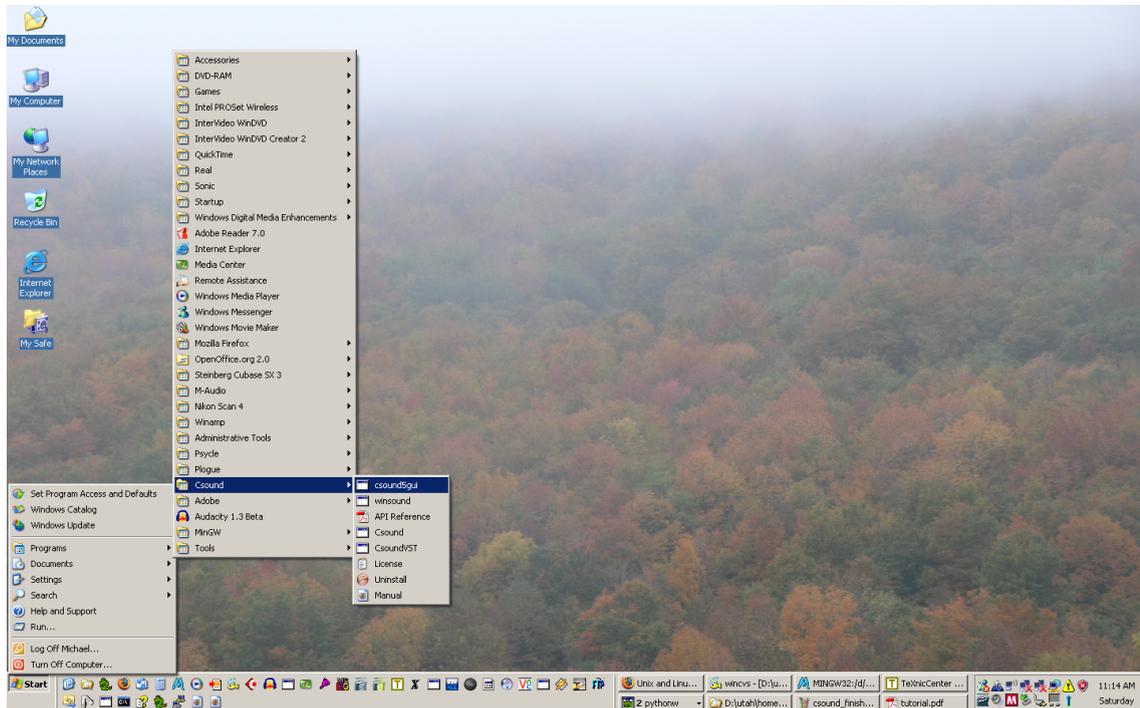


Figure 2.8: Csound Start Menu

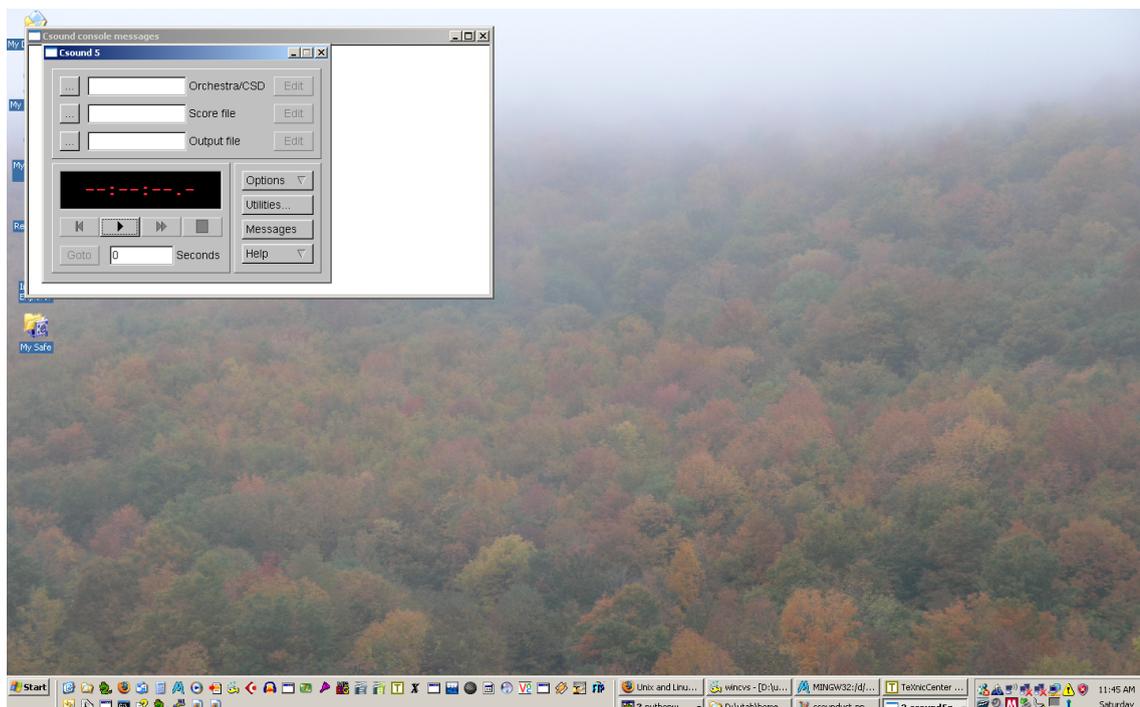


Figure 2.9: Csound GUI

2.1.3 Configuring Csound

This section assumes that you have installed Csound in the **C:/Csound** directory. In the following, replace this with your actual installation directory.

Configuring `.csoundrc`

Using a text editor (not a word processor!)¹, take a look at the **C:/Csound/.csoundrc** file. This file provides default command-line options that take effect each time you run Csound, unless you provide another value for the option. As installed, it reads:

```
-d -nl35 -HD -s -W -o dac --rtaudio=pa -b 128 -B 2048 --expression-opt
```

The meaning of these options is as follows:

- d** Do not show graphs of function tables.
- nl35** Print informational messages about audio amplitude, audio samples out of range, warnings, and errors, using color codes.
- HD** Do not print a heartbeat at each kperiod.²
- s** Use 16-bit short integers for audio samples.
- W** Use the standard Microsoft WAV format for sound files.
- o dac** Send real-time audio output to your computer's default audio interface (i.e., digital-to-audio converter).
- rtaudio=pa** Use the PortAudio driver for real-time audio (works on Windows, Linux and Apple).
- b 128** The number of audio sample frames³ in Csound's software buffer.
- B 2048** The number of audio sample frames in the audio interface's hardware buffer. This should be a small (e.g. 2 to 10) integral multiple of **-b**.

¹Do not use the default text editor on Windows, which is Notepad! Csound files typically have Unix line endings (linefeed only), whereas Notepad only works properly with Windows line endings (linefeed plus carriage return). I recommend that you install and use SciTE [14], a general-purpose text editor for which you can get Csound orchestra language syntax coloring. You can obtain Csound API and orchestra language syntax coloring properties from http://solipse.free.fr/Api_&csound.properties/csound.api and http://solipse.free.fr/Api_&csound.properties/csound.properties, respectively. Then in your global options file, around line 539 add a new line **Csound|orc|** and around line 611 add a new line **import csound**. Line numbers are very approximate, but you should see similar statements for other languages in the correct locations. You can even run Csound from SciTE. If you must use an existing Windows program, use WordPad, not Notepad, and be sure to save your work as a plain text file with the proper filename extension.

²A kperiod is one Csound control sample, during which Csound computes 1 or more audio sample frames. By computing anywhere from 10 to a hundred or so sample frames per kperiod, Csound can run much more efficiently.

³An audio sample is one number. An audio sample frame consists one number for each channel of an audio signal. When people say sample rate, they usually mean sample frame rate.

2 Getting Started

expression-opt Tell the Csound orchestra language compiler to optimize arithmetic and logic expressions.

For the complete meaning of all Csound options, see the reference manual [10]. The above options should work for real-time audio output on all operating systems and computers. For now, there is no need to change these options, but later you may wish to modify them according to what you learn about your computer and audio interface.

Csound configuration is affected by a number of environment variables,⁴ which are all documented in the Csound manual [10].

Configuring **csound5gui**

Run **csound5gui**. Click on the Options menu button, and select the General item, which will display a dialog box for configuring **csound5gui** (Figure 2.9).

I suggest that you change the default values for Text editor and Sound editor to helper applications I think you will find much more useful. I recommend SciTE [14] as the text editor,⁵ and Audacity [15] as the sound editor, but there are other options (see Appendix B).

2.1.4 Offline-Line Rendering

Offline rendering is rendering music as a sound file, before you hear it. For complex pieces, this can take much longer than listening to the finished piece. This concept may be unfamiliar to you, but it does give you the power to make music that would otherwise be completely impossible.

Some other music software can do offline rendering under one name or another. Cubase, for example, calls it Export Audio Mixdown. Csound was originally designed only for offline rendering. We will use offline rendering to create your first Csound piece, because it does not require any configuration for your audio interface it is guaranteed to work!

Csound is capable of state-of-the-art audio quality, equal to or better than the best recording gear. For more discussion of how to achieve this quality, see Appendix C. The short piece you are about to render has been modified to render at high resolution, so it should serve as something of a demonstration of what Csound can do.

⁴ An environment variable is a string in the form **NAME=value** that the user sets, and the operating system remembers and passes along to programs when they start. The program can look up the value that has been assigned to the variable in order to locate directories and files, set numbers, and so on. The proper way to set environment variables depends on your version of Windows. On Windows XP, go to the Start Menu, Settings item, Control Panel item, System icon, Advanced tab, Environment Variables button to bring up a dialog box where you can create, edit, or delete persistent environment variables.

⁵If you use SciTE, be sure to configure it to use linefeeds only for line endings, by using the Options menu, Open Global Options File command to put the line **eof.mode=LF** into SciTE's global options file.

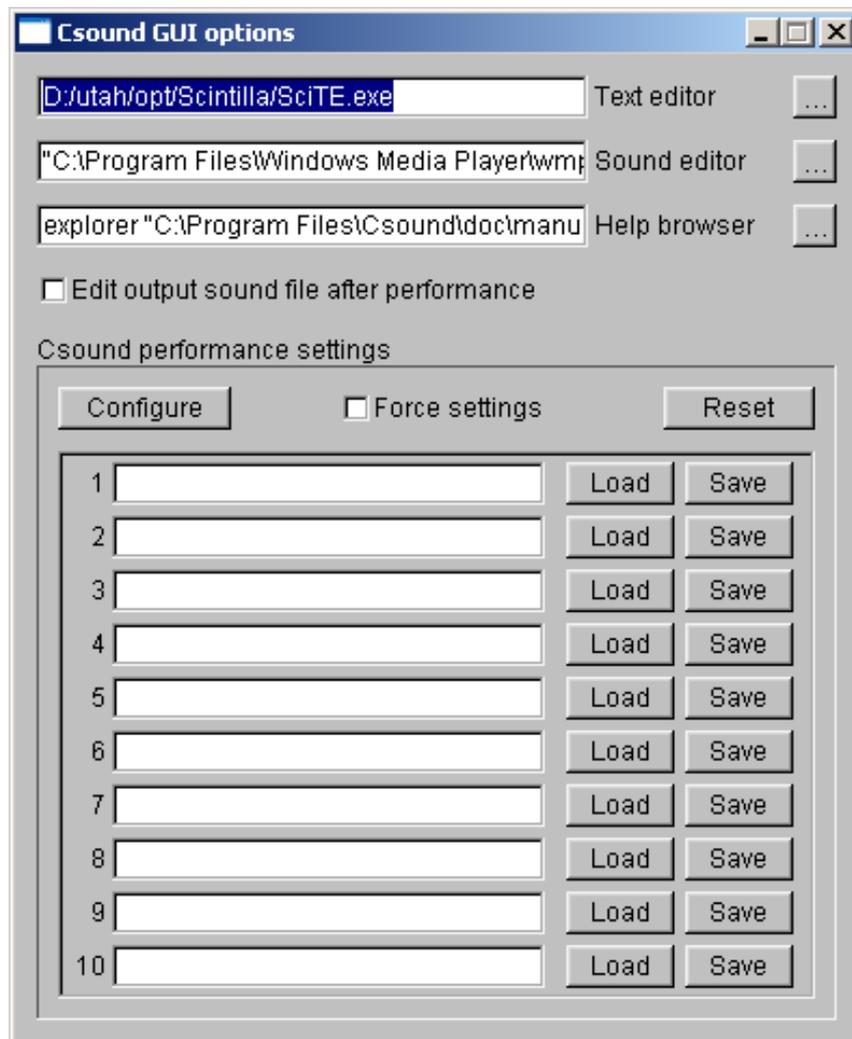



Figure 2.10: Configuring **csound5gui**

2 Getting Started

As you may have gathered, there many ways of running Csound. The two ways we are concerned with here are the original way, as a command-line program,⁶ and as a GUI program. We will run the piece both ways.

Using the Command Line

Open a console window (Windows Start menu, Run item, type **cmd** into the Open: eld, press the ENTER key). Type **C:** [ENTER] ([ENTER] means press the ENTER key) or whatever the drive is where you installed Csound). Type **cd \Csound** [ENTER] to navigate to the **Csound** directory. Type **csound** [ENTER] to run Csound (Figure 2.11).

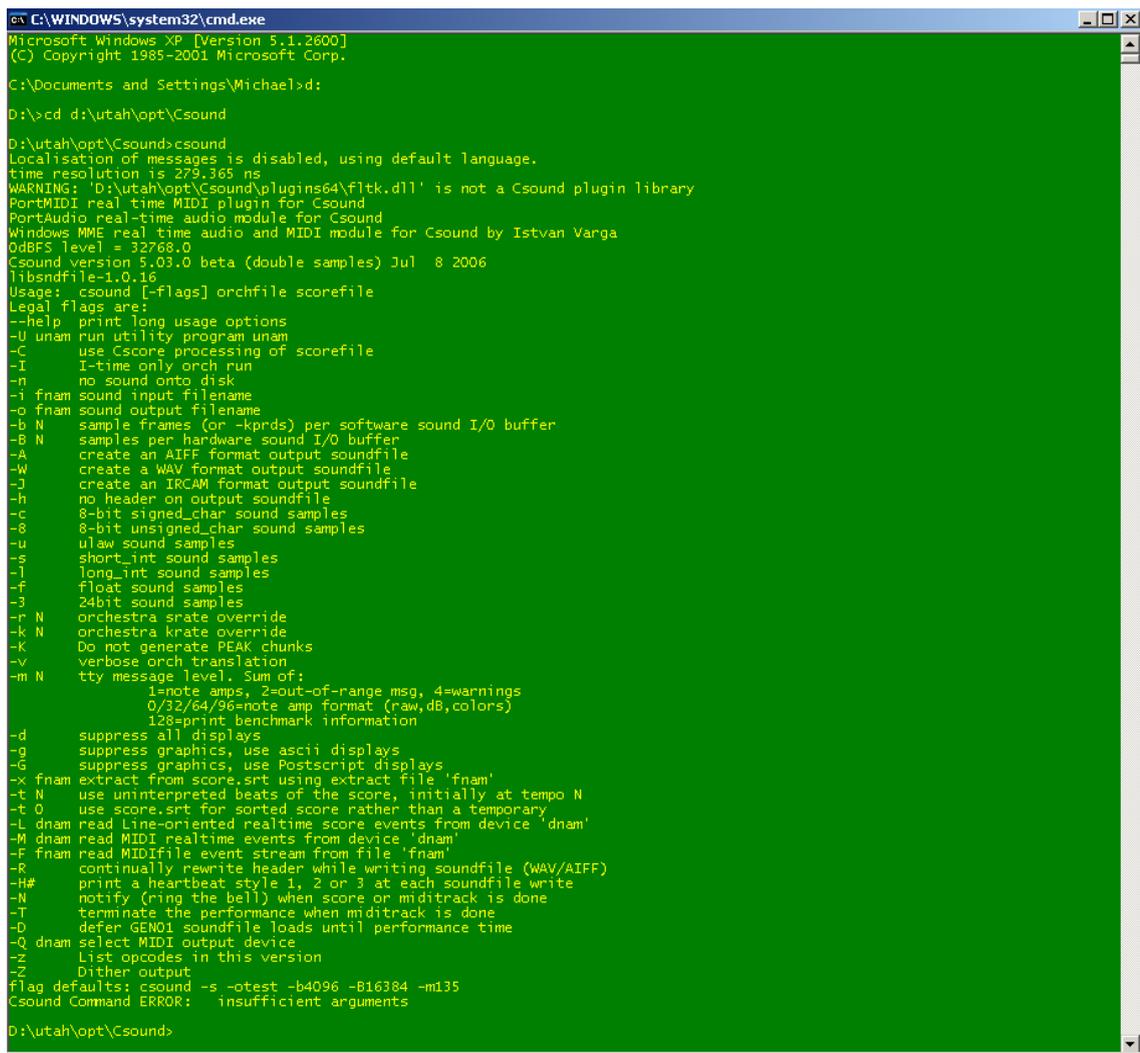

```
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\Michael>d:
D:\>cd d:\utah\opt\Csound
D:\utah\opt\Csound>csound
Localisation of messages is disabled, using default language.
time resolution is 279.365 ns
WARNING: 'D:\utah\opt\Csound\plugins64\fltk.dll' is not a Csound plugin library
PortMIDI real-time MIDI plugin for Csound
PortAudio real-time audio module for Csound
Windows MME real-time audio and MIDI module for Csound by Istvan Varga
OdBFS level = 32768.0
Csound version 5.03.0 beta (double samples) Jul 8 2006
libsndfile-1.0.16
Usage: csound [-flags] orchfile scorefile
Legal flags are:
--help print long usage options
-U unam run utility program unam
-C use Cscore processing of scorefile
-I i-time only orch run
-N no sound onto disk
-i fnam sound input filename
-o fnam sound output filename
-b N sample frames (or -kprds) per software sound I/O buffer
-B N samples per hardware sound I/O buffer
-A create an AIFF format output soundfile
-W create a WAV format output soundfile
-J create an IRCAM format output soundfile
-h no header on output soundfile
-c 8-bit signed_char sound samples
-8 8-bit unsigned_char sound samples
-u ulaw sound samples
-s short_int sound samples
-l long_int sound samples
-f float sound samples
-3 24bit sound samples
-r N orchestra srate override
-k N orchestra krate override
-K Do not generate PEAK chunks
-v verbose orch translation
-m N tty message level. Sum of:
    1=note amps, 2=out-of-range msg, 4=warnings
    0/32/64/96=note amp format (raw,dB,colors)
    128=print benchmark information
-d suppress all displays
-g suppress graphics, use ascii displays
-G suppress graphics, use Postscript displays
-x fnam extract from score.srt using extract file 'fnam'
-t N use uninterpreted beats of the score, initially at tempo N
-t 0 use score.srt for sorted score rather than a temporary
-L dnam read Line-oriented realtime score events from device 'dnam'
-M dnam read MIDI realtime events from device 'dnam'
-F fnam read MIDIfile event stream from file 'fnam'
-R continually rewrite header while writing soundfile (WAV/AIFF)
-H# print a heartbeat style 1, 2 or 3 at each soundfile write
-N notify (ring the bell) when score or miditrack is done
-T terminate the performance when miditrack is done
-D defer GEN01 soundfile loads until performance time
-Q dnam select MIDI output device
-z List opcodes in this version
-Z Dither output
flag defaults: csound -s -otest -b4096 -B16384 -m135
Csound Command ERROR: insufficient arguments

D:\utah\opt\Csound>
```

Figure 2.11: Windows Console

⁶What is the command line? Every operating system has one. It is a console window that has a prompt where the user can type in text commands. On Windows, you can open the console by going to the Start menu, selecting the Run item, typing **cmd** in the Open: eld, and clicking the OK button. When you see the prompt, type **dir** and press the ENTER key as an example of executing a command.

The text that you see consists of messages that Csound has printed out. You did not supply the required command-line options to Csound, so it has printed out a summary of the options to help you. To see even more options, type **csound --help [ENTER]**.

Now, type **csound examples\xanadu-high-resolution.csd [ENTER]**. The **.csd** file contains in plain text, like all **.csd** files, a Csound score, a Csound orchestra for rendering the score, and command-line options in the **<CsOptions>** tag to control the rendering. The meanings of the options for this piece are as follows:

- R** Rewrite the header of the output sound file periodically, so that if you stop Csound in mid-performance, or it crashes, you should still be able to hear as much of the sound file as was written before Csound stopped.
- W** Use the standard Microsoft WAV sound file format.
- Z** Dither the signal just before writing to the output. Dither is noise that is applied to the signal in order to mask and hide other noise.
- f** Use floating-point numbers to represent audio samples. Float samples have the greatest dynamic range and precision.
- o** **xanadu.wav** Output to a sound file named **xanadu.wav**.

The messages (Figure 2.12) list the instruments that Csound has compiled, e.g. **instr 1**, **instr 2**, and so on (more on this later), then some other information about how Csound has compiled the orchestra and score in the **.csd** file, then the name of the output sound file. Then come messages indicating the progress and status of rendering, e.g. **new alloc for instr 1**: indicates that a new instance of instrument 1 has been created to satisfy the demands of the score. Messages starting with **B**, e.g.

B	15.500	..	22.500	T	22.500	TT	22.500	M	9286.3	9200.8
B	22.500	..	22.600	T	22.600	TT	22.600	M	5744.3	6443.3
B	22.600	..	22.700	T	22.700	TT	22.700	M	7632.9	7294.0
B	22.700	..	22.800	T	22.800	TT	22.800	M	8855.0	7862.5
B	22.800	..	22.900	T	22.900	TT	22.900	M	8845.9	7613.5
B	22.900	..	23.000	T	23.000	TT	23.000	M	8541.2	7858.1

indicate blocks of synthesis, including the time within a marked section of the score **T**, the total time for the whole score **TT**, and the mean amplitude **M** of the signal in each channel of the audio output during that time. These amplitudes are critical, for Csound can easily produce a signal that is so loud it clips. Every time this happens, Csound prints a warning message. A new block begins for each new score event.

There are various ways to now actually hear the piece. All installations of Windows feature the Windows media player, which can play high-resolution sound files, and which is usually accessible on the Windows task bar. Open the media player, and use the File menu, Open command to navigate to the Csound directory and open the **xanadu.wav** file. You can now play the piece, although of course it will sound much better if you have an audio interface running into monitor speakers or good home stereo speakers. The piece may also sound good through headphones plugged directly into your computer, though that will depend on the quality of your computer's audio systems—newer computers have much better sound. Media Center PCs may even have high-resolution audio built in.

2 Getting Started

```
C:\WINDOWS\system32\cmd.exe - csound examples\xanadu.csd
-M dnam read MIDI realtime events from device 'dnam'
-F fnam read MIDIfile event stream from file 'fnam'
-R      continually rewrite header while writing soundfile (WAV/AIFF)
-H#    print a heartbeat style 1, 2 or 3 at each soundfile write
-N     notify (ring the bell) when score or miditrack is done
-T     terminate the performance when miditrack is done
-D     defer GEN01 soundfile loads until performance time
-Q dnam select MIDI output device
-Z     List opcodes in this version
-z     Dither output
flag defaults: csound -s -otest -b4096 -B16384 -ml35
Csound Command ERROR:  insufficient arguments

D:\utah\opt\Csound\csound examples\xanadu.csd
Localisation of messages is disabled, using default language.
time resolution is 279.365 ns
WARNING: 'D:\utah\opt\Csound\plugins64\fltk.dll' is not a Csound plugin library
PortMIDI real time MIDI plugin for Csound
PortAudio real-time audio module for Csound
Windows MME real time audio and MIDI module for Csound by Istvan Varga
OdBFS level = 32768.0
Csound version 5.03.0 beta (double samples) Jul  8 2006
libsndfile-1.0.16
UnifiedCSD:  examples\xanadu.csd
STARTING FILE
Creating options
Creating orchestra
Creating score
orchname:  C:\DOCUME~1\Michae\LOCALS~1\Temp\cs21.orc
scorename: C:\DOCUME~1\Michae\LOCALS~1\Temp\cs22.sco
rtaudio:  PortAudio module enabled ... using callback interface
rtmidi:   PortMIDI module enabled
orch compiler:
70 lines read
      instr 1
      instr 2
      instr 3
Elapsed time at end of orchestra compile: real: 0.046s, CPU: 0.047s
sorting score ...
... done
Elapsed time at end of score sort: real: 0.067s, CPU: 0.063s
Csound version 5.03.0 beta (double samples) Jul  8 2006
displays suppressed
OdBFS level = 32768.0
orch now loaded
audio buffered in 128 sample-frame blocks
writing 1024-byte blks of floats to Xanadu.wav (WAV)
SECTION 1:
ftable 1:
ftable 2:
ftable 3:
new alloc for instr 1:
new alloc for instr 3:
B 0.000 .. 0.100 T 0.100 TT 0.100 M: 1999.4 1999.4
new alloc for instr 1:
B 0.100 .. 0.200 T 0.200 TT 0.200 M: 5833.3 3897.4
new alloc for instr 1:
B 0.200 .. 0.300 T 0.300 TT 0.300 M: 9153.1 4662.7
new alloc for instr 1:
B 0.300 .. 0.400 T 0.400 TT 0.400 M: 9861.6 6790.9
new alloc for instr 1:
B 0.400 .. 0.500 T 0.500 TT 0.500 M: 11906.3 7943.6
new alloc for instr 1:
```

Figure 2.12: Command-Line Rendering

Using `csound5gui`

Now render the same piece using a GUI front-end to Csound. Run `csound5gui`. Click on the square button with three dots next to the Orchestra/CSD text field. This will open a file dialog. Navigate to the `C:/Csound/examples` directory and load the `xanadu-high-resolution.csd` file. Click on the Edit button next to the Orchestra/CSD field. You can arrange or tile the control window, the messages window, and the editor so that you can move back and forth for more efficient working.

`csound5gui` will, by default, use the Csound options set in the `<CsOptions>` tag of the `.csd` file. However, you can override these options manually. Use the Options pop-up menu, Csound... item, to bring up the Csound performance settings dialog (Figure 2.13).

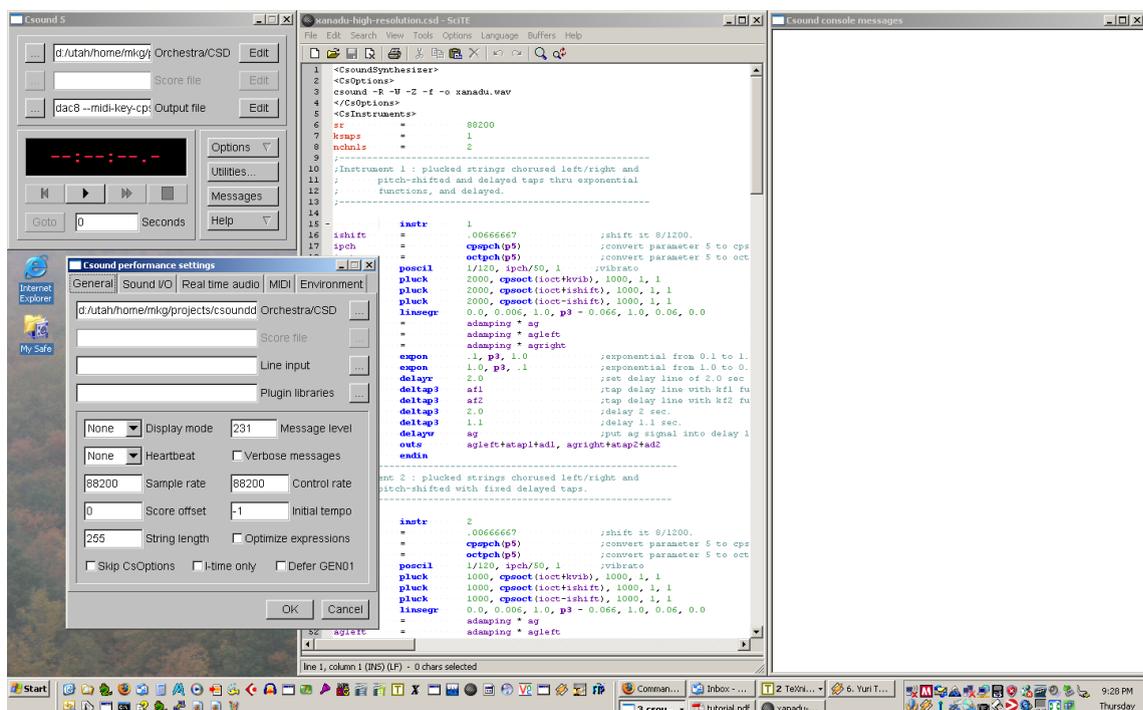


Figure 2.13: General Options

1. Select the General tab, and type **88200** into both the Sample rate and the Control rate fields (corresponds to the `-r` and `-k` options),
2. Select the Sound I/O tab, and type **xanadu.wav** into the Output file field (corresponds to the `-o` option).
3. Use the File type combo box, and select the **wav** item to produce a Windows WAV format sound file (corresponds to the `-W` option).
4. Use the Sample format combo box and select the **float** item to write floating-point samples (the highest resolution commonly used) in the output sound file (corresponds to the `-f` option).

2 Getting Started

5. Enable the Rewrite header checkbox, to ensure that after every kperiod, Csound will rewrite the output sound file header, so that the sound file can be played even if Csound stops in mid-rendering (corresponds to the **-R** option).
6. Enable the Dither checkbox, to cause the final audio output to be dithered just before it is written to the output, which masks noise introduced by arithmetic errors and other processing artifacts (corresponds to the **-Z** option).
7. If you want ID3 tags encoded into the sound file header for copyright or mastering purposes, enter your data in the Sound file tags section (the fields correspond to the **-+id_artist**, **-+id_comment**, **-+id_copyright**, **-+id_date**, **-+id_software**, and **-+id_title** options).

Now close the Csound performance settings dialog, and click on the Play/Pause button (Figure 2.14).

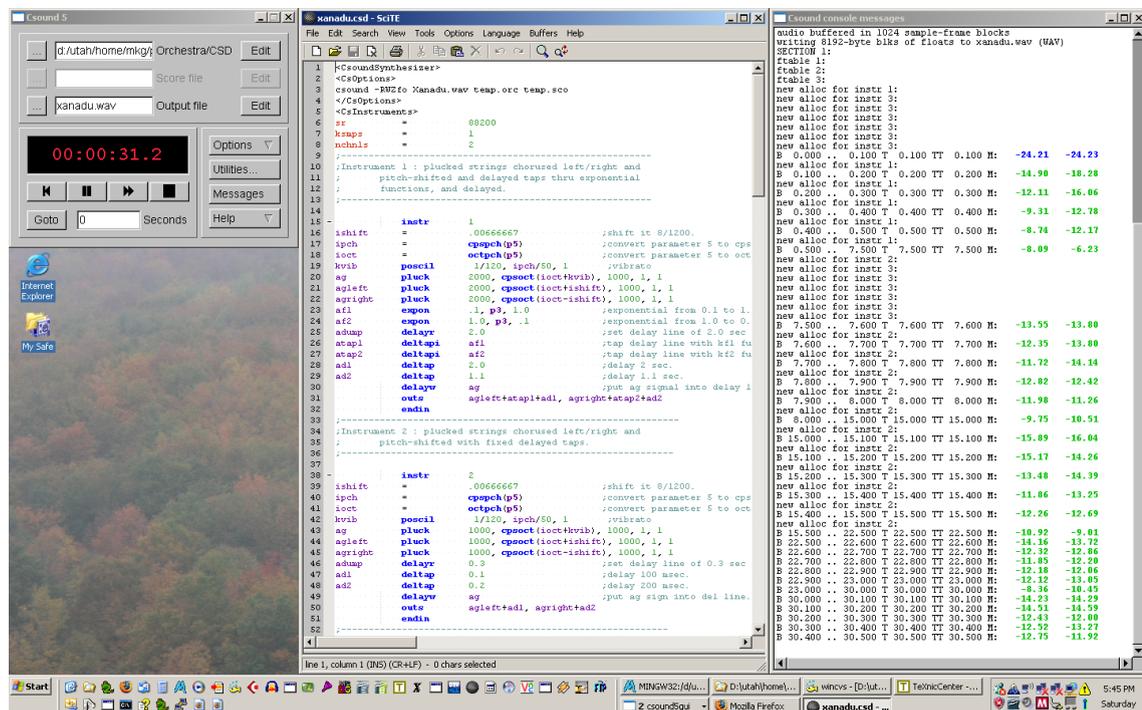


Figure 2.14: GUI Rendering

As the piece renders, the Current score time field in **csound5gui** displays the elapsed score time — not the elapsed real time. For real-time performance, score time is the same as real time; for off-line rendering, score time can run either faster or slower than real time. At the same time, Csound prints messages to the Csound console messages window.

You can stop rendering at any time by click on the Stop button. After stopping, you can restart. You can even restart part-way into the score, by entering a value in seconds into the Goto field and clicking on the Goto button.

When the piece has finished rendering, you can hear it by clicking on the Edit button for the Output file field, which, if you have configured an audio editor for

csound5gui, will open the editor with the output sound file already loaded and ready to play or edit (Figure 2.15).

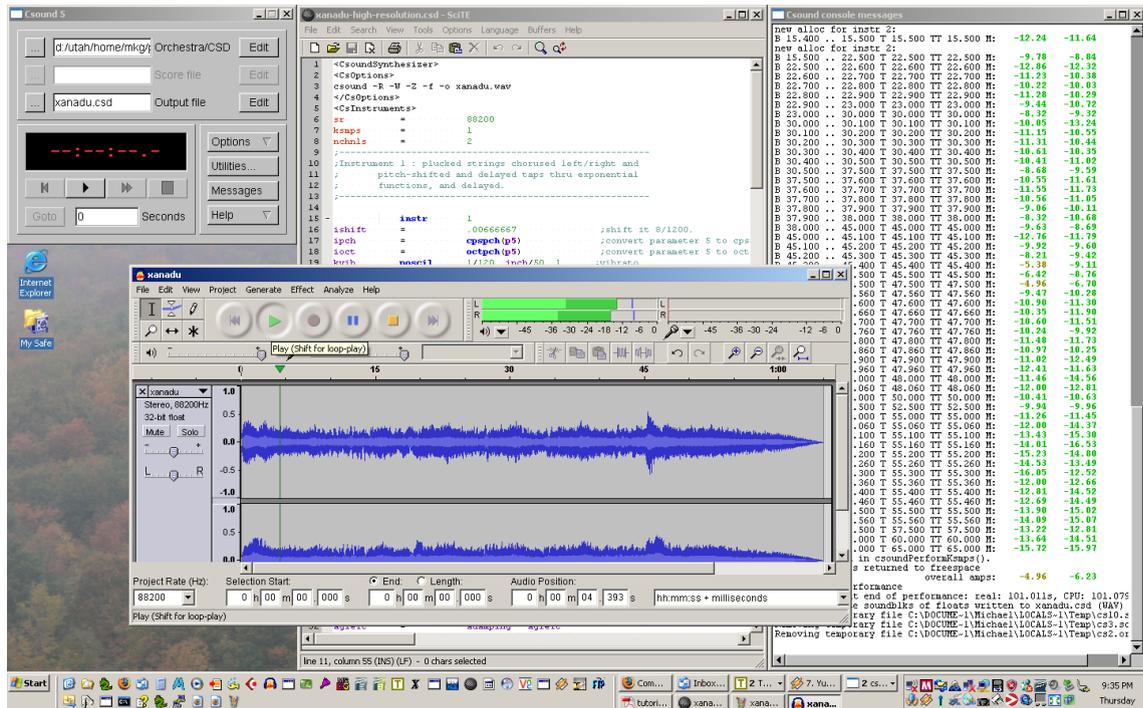


Figure 2.15: Playing Output Sound file

2.1.5 Real-Time MIDI Performance

Real-time MIDI performance means playing Csound as a live MIDI synthesizer. Your computer must have an audio interface connected to headphones or speakers, your computer must also have a MIDI interface, and you must plug the MIDI out port of your MIDI keyboard or other controller into the MIDI In port of your MIDI interface.

You start Csound with an orchestra that is designed for real-time MIDI performance, you play your controller, Csound renders what you play as you play it, and you hear the audio output from your speakers or headphones.

If you have a reasonably new personal computer with a reasonably up to date version of Windows, you will hear what you are playing within a few milliseconds of when you play it. Since your reaction time is probably around 20 milliseconds or a little less, and even the best keyboard players are only accurate within about 5 milliseconds, that is fast enough to seem almost instantaneous.

The following explains how to do real-time MIDI performance on my new notebook computer, running Windows XP Media Center Edition, using an M-Audio Ozone as audio interface, MIDI interface, and MIDI keyboard. Assuming that you have already installed your audio and MIDI interfaces and controllers, you would take almost identical steps with your own setup.

1. Run **csound5gui**.

2 Getting Started


2. Click on the button with three dots by the Orchestra/CSD field to open the Select orchestra or CSD file dialog. Navigate to the **C:/Csound/examples** directory, and open the **CsoundVST-nonixer-flags.csd** file (currently the Mixer opcodes do not seem to work with MIDI), which is designed for both offline rendering and real-time MIDI performance. **csound5gui** will, by default, use the Csound options set in the **<CsOptions>** tag of this file. However, you must override some of these options manually.
3. The current version of **csound5gui** is not written to set all possible Csound options from the settings dialog. Therefore, you must edit the orchestra file to set some options. Click on the Edit button next to the Orchestra/CSD field. In the orchestra file, locate the **<CsOptions>** tag. Add the following options to this tag: **--midi-key-oct=4 --midi-velocity=5**. These options cause MIDI note on message key numbers to be sent to p field 4 in Csound instruments as linear octaves, and MIDI velocity numbers to be sent to p field 5.
4. Add to your Csound orchestra header (i.e., before any instrument definition blocks) the following statement to reassign MIDI channel 1 to Csound instrument 5: **assign 1, 5**. Save the orchestra file.
5. All the other options can now be set by dialog. Use the Options pop-up menu, Csound... item, to bring up the Csound performance settings dialog. Select the General tab, and type **44100** into the Sample rate field, and **441** into the Control rate fields (corresponds to the **-r** and **-k** options). This will cause Csound to compute 100 audio sample frames for each control sample, or kperiod.
6. Select the Sound I/O tab, and type **dac** into the Output file field (corresponds to the **-o dac** option; **dac** stands for digital to audio converter, i.e. the audio output interface, and plain **dac** or **dac0** is the default audio port).
7. Use the File type combo box, and select the **wav** item to produce Windows WAV format audio (corresponds to the **-W** option).
8. Use the Sample format combo box and select the **short** item, to write 16-bit integer samples (CD quality) for audio output (corresponds to the **-s** option).
9. Disable the Rewrite header checkbox — it's irrelevant for real-time audio.
10. Disable the Dither checkbox — it's not needed for real-time audio.
11. Select the Real time audio tab, and select **PortAudio** in the Real time audio module combo box (corresponds to the **-+rtaudio=PortAudio** option).
12. Select **128** in the Buffer size in sample frames combo box (corresponds to the **-b128** option).
13. Select **4** in the Number of buffers combo box (corresponds to the **-B512** option). At 44100 frames per second, that gives an audio output latency of 11.6 milliseconds.

14. Enable the Perform in a separate thread checkbox.
15. Select the MIDI tab, and select **PortMidi** in the Real time MIDI module combo box (corresponds to the **-+rtmidi=PortMidi** option).
16. Type **0** in the Input device field (corresponds to the **-M0** option; **0** is the default MIDI port).

Now close the Csound performance settings dialog, and click on the Play/Pause button. You should hear nothing, because the `<CsScore>` tag in the `.csd` file contains no notes — you will be playing the notes in. If you do hear anything, you have a problem!

Now, play a few notes on your keyboard or other MIDI controller. You should hear something now. More specifically, you should hear a Hammond B3 organ sound. If you don't hear anything, or if you do hear something but it sounds wrong, you have a problem. Click on the Stop button.

The most likely problem is that the default audio device or MIDI device is not suitable. As Csound runs, it prints a list of available devices, so look at the Csound console messages window to see them (Figure 2.16).

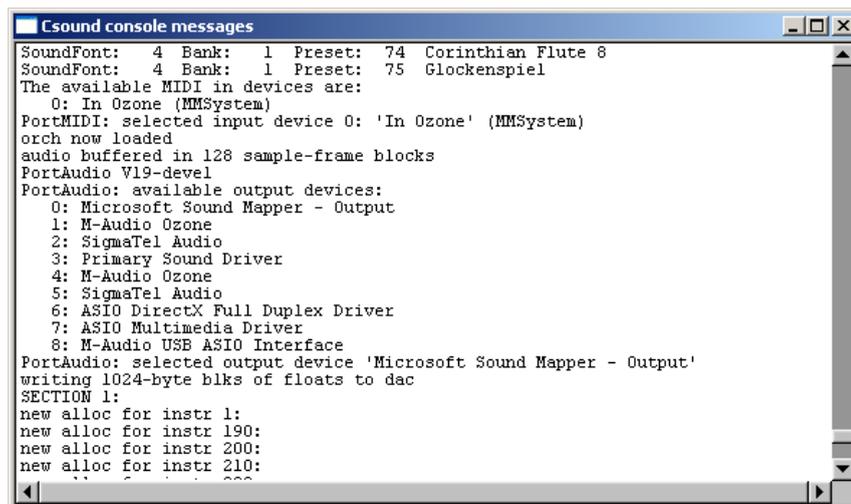

```

Csound console messages
SoundFont: 4 Bank: 1 Preset: 74 Corinthian Flute 8
SoundFont: 4 Bank: 1 Preset: 75 Glockenspiel
The available MIDI in devices are:
0: In Ozone (MMSystem)
PortMIDI: selected input device 0: 'In Ozone' (MMSystem)
orch now loaded
audio buffered in 128 sample-frame blocks
PortAudio V19-devel
PortAudio: available output devices:
0: Microsoft Sound Mapper - Output
1: M-Audio Ozone
2: SigmaTel Audio
3: Primary Sound Driver
4: M-Audio Ozone
5: SigmaTel Audio
6: ASIO DirectX Full Duplex Driver
7: ASIO Multimedia Driver
8: M-Audio USB ASIO Interface
PortAudio: selected output device 'Microsoft Sound Mapper - Output'
writing 1024-byte blks of floats to dac
SECTION 1:
new alloc for instr 1:
new alloc for instr 190:
new alloc for instr 200:
new alloc for instr 210:

```

Figure 2.16: Available Interfaces

If you know the correct audio and MIDI devices, go back to **csound5gui** and change the device number in the Output field. In this case, I know that the Ozone's ASIO interface, device number 8, has the best latency. So, I change the output to **dac8**. If you don't know the right device, change the number systematically until you find the best one. If that still doesn't work, try increasing the value of the **-b** option for higher latency.

After making your corrections, click on the Play/Pause button and try playing a few notes again. As the piece renders, the Current score time field in **csound5gui** displays the elapsed real time, and Csound messages are printed to the Csound console messages window. These will include **rtevent** notifications for real-time score events, and **midiKey** and **midiVelocity** notifications showing how the MIDI note on message fields are mapped to Csound p fields (Figure 2.17).

2 Getting Started

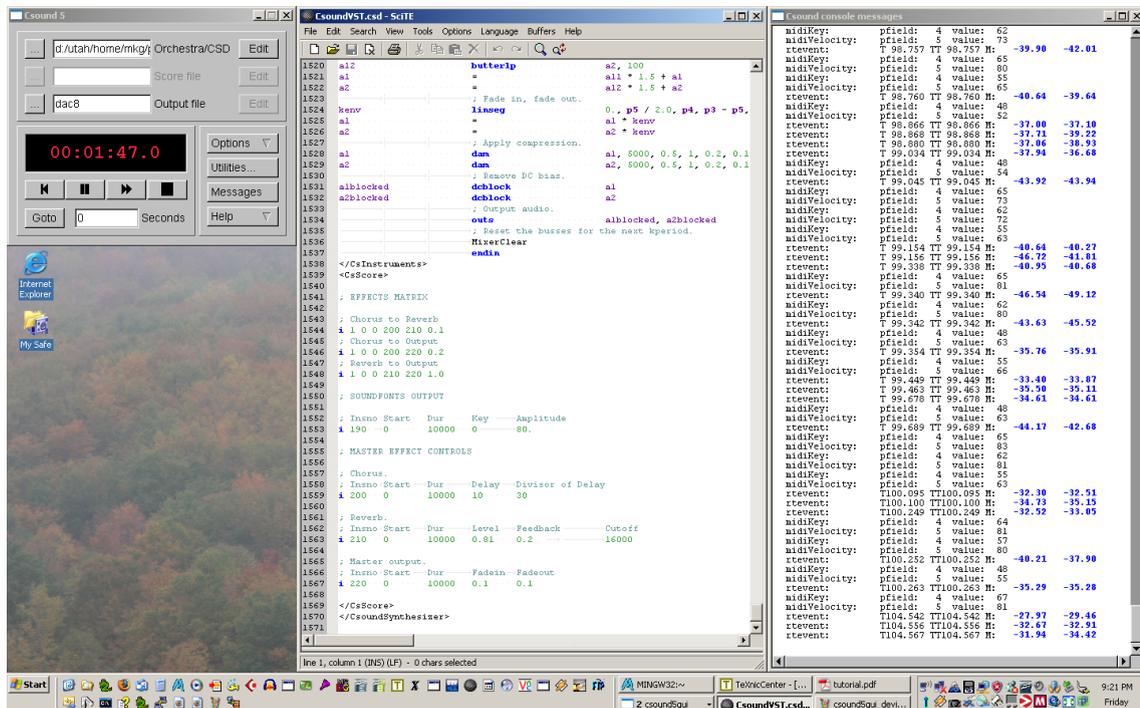


Figure 2.17: MIDI Performance

You can stop rendering at any time by clicking on the Stop button, and after stopping you can restart.

To hear different Csound instruments, change the **assign** statement to other instrument numbers, or change the MIDI channel assignment of your MIDI controller, and start Csound again.

2.2 On Linux

To be completed.

2.3 On Apple

To be completed.

3 Writing Orchestras and Scores

The chapter starts with two short sections on how software synthesizers in general, and Csound in particular, work. You can skip these sections if you are not interested. There follows a section on writing the simplest possible instrument, and making it sound better and better through a sequence of increasingly refined versions.

3.1 Signal Flow Graphs

Almost all software synthesizers run as a set of unit generators (opcodes, in Csound terminology) that are connected so that the outputs of some units feed into the inputs of other units. It is very similar to a modular electronic synthesizer, such as a Moog synthesizer, in which small electronic units are patched together with cords. In software engineering, this kind of wiring diagram is called a synchronous signal flow graph. Oscillators, filters, modulators, envelope generators, and even arithmetic operators and functions are all unit generators.

In Csound, each **instr** or instrument block in the orchestra code is one signal flow graph. The inputs to an instrument consist of any number of **p** elds (standing for parameter elds), which come from **i** statements in the score, or from real-time events:

- p1** Always represents instrument number, which can be an integer or a fraction. Score events with fractional numbers are considered to be tied in the sense that after an instrument instance is initialized, a new score event with the same fractional number is sent to the already running instrument instance, which skips its initialization run. This produces a very good approximation of a slur tying two notes in music notation.
- p2** Always represents the time that the score event begins, although this time can be in seconds or, if the score contains a **t** (tempo) statement, in musical beats.
- p3** Always represents the duration of the score event, in seconds or in beats; if -1, the event will continue indefinitely. Note that instruments can modify the value of their own **p3** elds.
- p4** . . . **pN** Higher **p** elds have user-defined meanings. However, throughout this tutorial, **p4** represents pitch as MIDI key number,¹ and **p5** represents loudness as MIDI velocity number.²

¹MIDI key number represents pitch in semitones, ranging from 0 to 127, with middle C = 60. In Csound, fractional MIDI key numbers can be used to represent non-equally-tempered pitches.

²MIDI velocity number represents loudness in a roughly logarithmic scale, ranging from 0 to 127, with mezzo-forte being perhaps 100.

3 Writing Orchestras and Scores

Each Csound opcode is one unit generator, and is written as one line of text. Assignment statements, logical operators, and arithmetic operators are also implemented, when the orchestra file is compiled, as unit generators.

Opcodes accept zero or more input arguments, and output zero or more return values. The output of an instrument block is sent to output using various opcodes, usually **outs** or **outc**. Since these opcodes have no outputs inside the instrument, they are root nodes of the graph (of course, a graph may have more than one root node).

In Csound, variables and opcodes are active at different rates:

i-rate Initialization rate — scalar variables whose names begin with the letter **i**, and whose values are fixed when an instrument instance is initialized, and never change after that.

k-rate Control rate — scalar variables whose names begin with the letter **k**, and whose values can change at the control rate.

a-rate Audio rate — vector variables whose names begin with the letter **a**, and whose values can change at the sample frame rate. Obviously, all input and output audio signals must be represented in **a-rate** variables.

3.2 How Csound Works

3.2.1 Csound Files

Listing 3.1 shows a very simple **.csd** file, which creates the simplest possible instrument and plays one note on it. The code is however extensively commented.

Listing 3.1: Simple Orchestra

```
<CsoundSynthesizer>
<CsOptions>
-R -W -f -o tutorial.wav
</CsOptions>
<CsInstruments>
; Sample frames per second.
sr = 88200
; Number of sample frames per control period.
ksmps = 1
; Number of audio output channels.
nchnls = 2
; Amplitude of 0 decibels full scale (maximum amplitude).
0dbfs = 32767

; Instrument number one -- very simple.
instr 1
; Pfield 4 contains pitch as MIDI key number.
ikey = p4
; Pfield 5 contains loudness as MIDI velocity number.
ivelocity = p5
; Translate MIDI key to linear octave.
ioctave = ikey / 12 + 3
; Translate linear octave to cycles per second.
ifrequency = cpsoct(ioctave)
; Translate MIDI velocity to decibels full scale.
idb = ivelocity / 127 * 84
; Translate decibels to output amplitude.
iamplitude = ampdb(idb)
; Generate a band-limited sawtooth wave.
```

```

aout          vco2          iamplitude, ifrequency
; Send the output to both channels
          outs          aout, aout
          endin
</CsInstruments>
<CsScore>
i 1 1 5 60 100
</CsScore>
</CsoundSynthesizer>

```

A **.csd** file is a kind of XML file, containing sections marked off by tags. The **<CsOptions>** tag contains command-line options, the **<CsInstruments>** tag contains the Csound orchestra, which in turns contains a header and one or more instrument definition blocks, and the **<CsScore>** tag contains zero or more **f** statements (for generating function tables) and **i** statements (for sending notes to instruments). Any line beginning with a semicolon is a comment and is not interpreted.

In order to make instrument definitions easier to read, many people follow the convention of writing each opcode line in 3 widely and evenly spaced columns, with the output variables flush left, the opcode itself in the middle (remember that = is an opcode), and the input parameters on the right. I also think it is easier to read if comments go above lines, not at the right of lines.

3.2.2 Performance Loop

When Csound reads the **.csd** file, this is what happens:

1. Csound loads any plugins in the **OPCODEDIR** (for 32 bit sample Csound) or **OPCODEDIR64** (for 64 bit sample Csound) directory.
2. Csound reads its input files. If the input is a **.csd** file, Csound creates a temporary orchestra (**.orc**) file from the **<CsInstruments>** tag of the **.csd** file, and a temporary score (**.sco**) file from the **<CsScore>** tag of the **.csd** file.
3. Csound parses its command-line options, which can come from various sources (in order of increasing precedence):
 - a) Csound's internal defaults.
 - b) A **.csoundrc** file in the user's home directory, or the directory specified by the **CSOUNDRC** environment variable.
 - c) A **.csoundrc** file in the current directory.
 - d) The **<CsOptions>** tag in the **.csd** file.
 - e) The command line.
4. Csound loads and enables any plugin modules required for audio or MIDI input or output.
5. Csound reads the orchestra file, and sets the sample frame rate, kperiod size, and number of audio output channels from the **sr**, **ksmps**, and **nchnls** statements, respectively, in the orchestra header.

3 Writing Orchestras and Scores

6. Csound parses the **instr** blocks in the orchestra file, and compiles each **instr** block into an instrument template, which contains storage for input fields, and two linked lists of opcode templates. One list is for initializing an instrument instance, and the other list is for operating the instance.
7. Csound reads the score file, translates tempo statements, score sections, macros, continuation and increment operators, and so on, and sorts the results to produce a sorted, time-warped, compiled score file.
8. Csound actually performs the compiled score with the compiled instrument templates:
 - a) Csound runs down the initialization list for any global instruments or opcodes, and calls each opcode's initialization function (e.g., to load SoundFonts).
 - b) Csound checks to see if any real-time events or score events are pending, or if performance has finished. If **f** statements are pending, Csound goes to step 8c. If **i** statements are pending, Csound goes to step 8d. If performance is finished, Csound goes to step 8f.
 - c) Csound allocates memory for any pending **f** statements, and initializes the function table; this can involve computing a mathematical curve, or loading a sound file or a table of data from the disk.
 - d) Csound looks for an inactive instrument instance for each pending **i** statement. If an inactive instance is found, Csound activates it. If there is no inactive instance, Csound creates a new instance by copying the instrument template (and its associated lists of opcode templates). Csound fills in the instance's p fields from the **i** statement. Csound then runs down the instance's initialization list, and calls each opcode's initialization function.
 - e) Csound performs one kperiod. Csound runs down the list of instrument instances. For each active instance, Csound runs down the instance's operation list, and calls each opcode's operation function. Inside the operation function, if there are any **a**-rate variables, an inner loop must run for **ksmps** sample frames to compute each element of the vector. If the current time has passed the sum of **p2** and **p3**, or if an instrument has turned itself off, Csound deactivates the instance. When all the instances have been run, Csound sends the audio output buffer to the output sound file or device. Csound then goes back to step 8b.
 - f) Csound calls a deinitialization function in each plugin, closes any device plugins, deallocates instrument instances, and resets itself for another performance (or exits).

3.3 Writing Your First Piece

Use a text editor to create a **.csd** file named **tutorial2.csd**, which should contain only the empty tags:

Listing 3.2: Empty .csd File

```
<CsoundSynthesizer >
<CsOptions >
</CsOptions >
<CsInstruments >
</CsInstruments >
<CsScore >
</CsScore >
</CsoundSynthesizer >
```

Now fill in the tags one at a time. If you are going to run the piece using **csound5gui**, you do not need to fill in the **<CsOptions>** tag. It may be a good idea, however, to put in some reasonable default options:

```
<CsOptions >
-W -f -R -o tutorial2.wav
</CsOptions >
```

Create the orchestra header for a sample frame rate of 88200, a control sample rate of 1, and stereo channels (i.e. for a high-resolution stereo sound file):

```
<CsInstruments >
sr          =          88200
ksmps      =          1
nchnls     =          2
</CsInstruments >
```

Add a global **ftgen** opcode to generate a global function containing a high-resolution sine wave. The number of the wavetable is stored in the global **gisine** variable. The parameters mean:

1. Function number (0 means automatically generate the number).
2. Time at which the function table will be created (0 means the beginning of performance).
3. Size of the table. The bigger the table, the less noise in the signal. 65536 is 2 to the 16th power, which produces a low-noise signal; increasing the size by 1 means that interpolating oscillators that require a power of 2 size have one element past the end of the table to use for interpolation (a guard point).
4. The **GEN** function used to generate the table; **GEN 10** generates a series of harmonic partials.
5. Further arguments depend on the **GEN** function. For **GEN 10**, the single parameter 1 means generate the first partial with amplitude 1, and no other partials i.e. a sine wave.

```
<CsInstruments >
sr          =          88200
ksmps      =          1
nchnls     =          2

gisine      ftgen          0, 0, 65537, 10, 1
</CsInstruments >
```

3 Writing Orchestras and Scores

3.3.1 Simple Sine Wave

Add an empty instrument definition for instrument number 1. Instrument definitions begin with the keyword **instr** and the instrument number, and end with the keyword **endin**.

```
<CsInstruments >
sr          =          88200
ksmps      =          1
nchnls     =          2

gisine      ftgen      0, 0, 65537, 10, 1

          instr      1
          endin
</CsInstruments >
```

In the instrument definition, create **i**-rate variables to receive MIDI key number and velocity number from p-elds 4 and 5:

```
          instr      1
ikey       =          p4
ivelocity  =          p5
          endin
```

Translate the MIDI key number in semitones with middle C = 60 to linear octaves with middle C = 8, and translate the MIDI velocity number to range from 0 to 84 (roughly the dynamic range in decibels of a compact disc):

```
          instr      1
ikey       =          p4
ivelocity  =          p5
ioctave    =          ikey / 12 + 3
idb        =          ivelocity / 127 * 84
          endin
```

Translate the octave and decibels to Csound's native units, which are cycles per second and amplitude:

```
          instr      1
ikey       =          p4
ivelocity  =          p5
ioctave    =          ikey / 12 + 3
idb        =          ivelocity / 127 * 84
ifrequency =          cpsoct(ioctave)
ianplitude =          ampdb(idb)
          endin
```

Add a signal generator, in this case a precision wavetable oscillator for producing a sine wave from our global table:

```
          instr      1
ikey       =          p4
ivelocity  =          p5
ioctave    =          ikey / 12 + 3
idb        =          ivelocity / 127 * 84
ifrequency =          cpsoct(ioctave)
ianplitude =          ampdb(idb)
asignal    =          poscil(ianplitude, ifrequency, gisine)
          endin
```

Send the signal you have generated to each channel of the stereo output:

```
          instr      1
ikey       =          p4
ivelocity  =          p5
ioctave    =          ikey / 12 + 3
idb        =          ivelocity / 127 * 84
```

```

ifrequency      =      cpsoct(ioctave)
ianplitude     =      anpdb(idb)
asignal        poscil  ianplitude, ifrequency, gisine
                  outs   asignal, asignal
                  endin

```

Your new instrument takes 5 p elds:

1. Instrument number.
2. Time in seconds.
3. Duration in seconds.
4. MIDI key number.
5. MIDI velocity.

Create an **i** statement to play a middle C note at mezzo-forte on this instrument at time 1 second for 3 seconds:

```

<CsScore>
i 1 1 3 60 100
</CsScore>

```

Your piece is now ready to perform (Listing 3.3).

Listing 3.3: Instrument De nition

```

<CsoundSynthesizer>
<CsOptions>
</CsOptions>
<CsInstruments>
sr          =      88200
ksmps      =      1
nchnls    =      2

gisine     ftgen   0, 0, 65537, 10, 1

instr      1
key       =      p4
velocity  =      p5
ioctave   =      key / 12 + 3
idb       =      velocity / 127 * 84
ifrequency =      cpsoct(ioctave)
ianplitude =      anpdb(idb)
asignal   poscil  ianplitude, ifrequency, gisine
                  outs   asignal, asignal
                  endin
</CsInstruments>
<CsScore>
i 1 1 3 60 100
</CsScore>
</CsoundSynthesizer>

```

Run **csound5gui**. Click on the square button with three dots next to the Orchestra/CSD text eld, and use the le dialog to open your **tutorial2.csd** le. Type **tutorial2.wav** in the Output le eld. Open the Options menu, Csound... item, and set the options in the Csound performance settings dialog, for **wav** File type, **float** Sample format, Enable dither, and Rewrite header.

Click on the Edit button next to the Orchestra/CSD eld, which will re-open the le for editing. Click on the Play/Pause button to render the piece. When the

3 Writing Orchestras and Scores

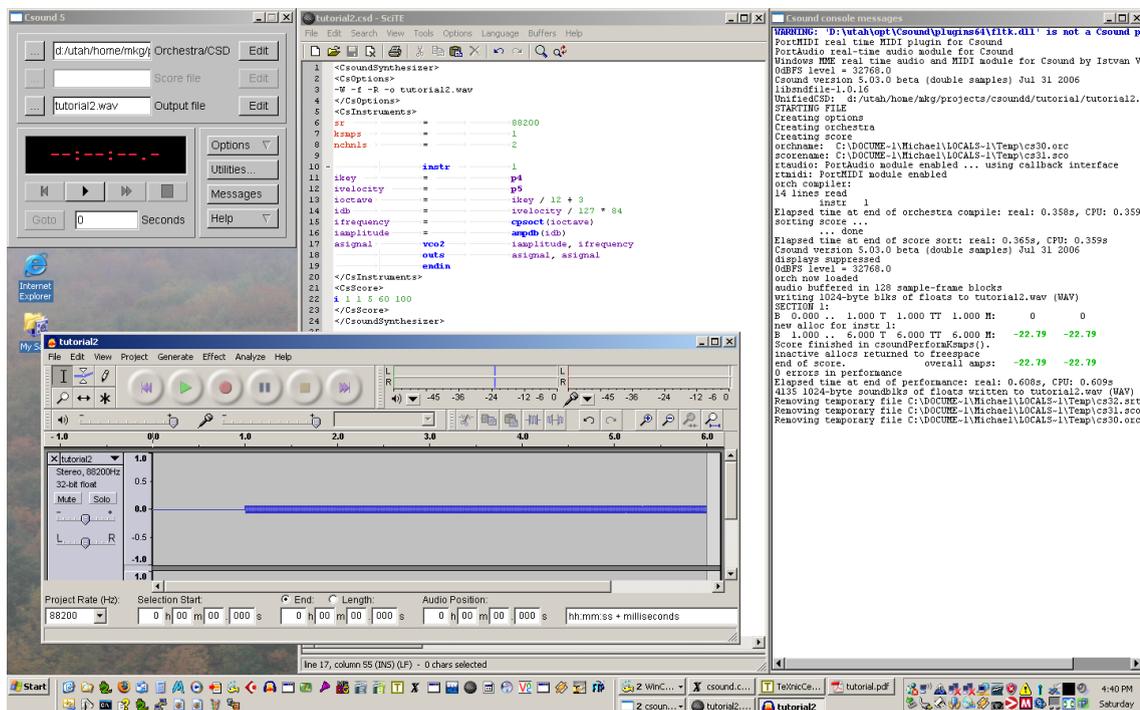


Figure 3.1: **tutorial2.csd**

rendering has completed, click on the Output field Edit button to hear the piece (Figure 3.1).

Well, it's not a very interesting piece! And typing in note statements becomes extremely tedious, even for a simple piece like Three Blind Mice. Of course, people who actually use Csound to make music either write programs to generate scores, or they use a MIDI sequencer or notation software, or they play live. Here, however, we will focus only on improving the sound of the instrument.

3.3.2 Simple Sine Wave, De-Clicked

The most obvious problem right now is that the sound begins and ends with an obnoxious click. This is caused by the sharp discontinuity in the signal when the note abruptly turns on and abruptly turns off. This can be fixed by adding a damping envelope to tail off the clicks. In fact, every Csound instrument, with rare exceptions, should have such a damping envelope. Make a copy of your instrument, and number it 2, and add a **linsegr** opcode to tail off the clicks. It is a good idea to add the attack and release times to p3, just in case you have a very short note.

```

instr                2
ikey                 =   p4
ivelocity           =   p5
ioctave              =   ikey / 12 + 3
idb                  =   ivelocity / 127 * 84
ifrequency          =   cpsoct (ioctave)
ianplitude          =   anpdb (idb)
asignal              =   poscil ianplitude, ifrequency, gisine
iattack              =   0.0015
irelease            =   0.002
isustain            =   p3

```

```

p3          =          iattack + isustain + irelease
adamping    =          linsegr    0.0, iattack, 1.0, isustain, 1.0, irelease, 0.0
asignal     =          asignal * adamping
            =          outs      asignal, asignal
            =          endin

```

Also add a note to test the new instrument. The `^+4` in p eld 2 means to add 4 to p eld 2 of the previous i statement. We do this to create a second of silence between each test note. For all subsequent modifications, in the same way, we will make a copy of the previous instrument and add a new test note to play it.

```

<CsScore>
i 1 1 3 60 100
i 2 ^+4 3 60 100
</CsScore>

```

Again, render and listen. The note now starts and ends abruptly but without clicks, which is what we want. Of course, the sound is still boring.

3.3.3 Simple Sine Wave, De-Clicked, ADSR Envelope

Let's add a real envelope to give some shape to the sound. Use the `mxadsr` opcode to add an attack, decay, sustain, release (ADSR) envelope with exponentially rising and falling segments (this is musically one of the commonest types of envelope).

```

instr       3
ikey        =          p4
ivelocity   =          p5
ioctave     =          ikey / 12 + 3
idb         =          ivelocity / 127 * 84
ifrequency  =          cpsoct(ioctave)
ianplitude  =          ampdb(idb)
ienvattack  =          0.004
ienvdecay   =          0.5
ienvlevel   =          0.25
ienvrelease =          0.05
aenvelope   =          mxadsr    ienvattack, ienvdecay, ienvlevel, ienvrelease
asignal     =          poscil    ianplitude, ifrequency, gsine
            =          asignal * aenvelope
iattack     =          0.0015
irelease    =          0.002
isustain    =          p3
p3          =          iattack + isustain + irelease
adamping    =          linsegr    0.0, iattack, 1.0, isustain, 1.0, irelease, 0.0
asignal     =          asignal * adamping
            =          outs      asignal, asignal
            =          endin

```

Better, but a sine wave is too plain.

3.3.4 Frequency Modulation, De-Clicked, ADSR Envelope

Add some basic frequency modulation to thicken up the sound. Use another `poscil` opcode to modulate the frequency of the signal generating oscillator. This has the effect of generating additional harmonics in the signal, whose content is controlled by both the amplitude and the frequency of the modulation.

```

instr       4
ikey        =          p4
ivelocity   =          p5
ioctave     =          ikey / 12 + 3
idb         =          ivelocity / 127 * 84

```

3 Writing Orchestras and Scores

```
ifrequency      =      cpsoct(ioctave)
iamplitude      =      ampdb(idb)
ienvattack      =      0.004
ienvdecay       =      0.5
ienvlevel       =      0.25
ienvrelease     =      0.05
aenvelope       =      mkadsr
amodulator      =      poscil
asignal         =      800.0, ifrequency * 7.00, gisine
asignal         =      iamplitude, ifrequency + amodulator, gisine
asignal         =      asignal * aenvelope
iattack        =      0.0015
irelease        =      0.002
isustain       =      p3
p3             =      iattack + isustain + irelease
adanping       =      linsegr
asignal        =      0.0, iattack, 1.0, isustain, 1.0, irelease, 0.0
asignal        =      asignal * adanping
outs           =      asignal, asignal
endin
```

The sound is thicker, but it's not changing much as it sounds. Real musical sounds tend to vary subtly all the time.

3.3.5 Frequency Modulation, De-Clicked, ADSR Envelope, Time-Varying Modulation

Take a step in this direction by using the ADSR envelope to modulate not only the signal amplitude, but also the amount of frequency modulation. The only difference is to multiply the **amodulator** variable by the **aenvelope** variable.

```
instr          =      5
ikey           =      p4
ivelocity      =      p5
ioctave       =      ikey / 12 + 3
idb           =      ivelocity / 127 * 84
ifrequency     =      cpsoct(ioctave)
iamplitude     =      ampdb(idb)
ienvattack     =      0.004
ienvdecay      =      0.5
ienvlevel      =      0.25
ienvrelease    =      0.05
aenvelope      =      mkadsr
amodulator     =      poscil
asignal        =      800.0, ifrequency * 7.00, gisine
asignal        =      iamplitude, ifrequency + amodulator * aenvelope,
                    gisine
asignal        =      asignal * aenvelope
iattack       =      0.0015
irelease      =      0.002
isustain      =      p3
p3           =      iattack + isustain + irelease
adanping     =      linsegr
asignal      =      0.0, iattack, 1.0, isustain, 1.0, irelease, 0.0
asignal      =      asignal * adanping
outs         =      asignal, asignal
endin
```

The sound is now almost usable. In fact, in some contexts, it probably is usable. In general, the more notes are playing, the simpler the actual sounds should be, and the fewer notes are playing, the more complex the individual notes should be. This sound would probably be usable in a busy texture. But suppose we are hearing only a few notes at a time?

3.3.6 Frequency Modulation, De-Clicked, ADSR Envelope, Time-Varying Modulation, Stereo Phasing

Add some delay lines with modulation of the delay times in opposing phase. This will create a moving texture that will shift from one side of the sound stage to the other. Apply the de-clicking envelope to the signal written to the delay line as well.

```

instr          6
ikey           =          p4
ivelocity     =          p5
ioctave       =          ikey / 12 + 3
idb           =          ivelocity / 127 * 84
ifrequency   =          cpsoct(ioctave)
iamplitude   =          ampdb(idb)
ienvattack   =          0.004
ienvdecay    =          0.5
ienvlevel    =          0.25
ienvrelease  =          0.05
aenvelope    =          mkadsr
amodulator   =          poscil
asignal      =          iamplitude, ifrequency + amodulator * aenvelope,
gisine
asignal      =          asignal * aenvelope
iattack      =          0.0015
irelease     =          0.002
isustain    =          p3
p3           =          iattack + isustain + irelease
adanping    =          linsegr
krtapmod    =          0.0, iattack, 1.0, isustain, 1.0, irelease, 0.0
kltapmod    =          poscil
adunp       =          0.003, 1, gisine, 0.5
ad1         =          delayr
ad2         =          1.0
ad1         =          deltapi
ad2         =          0.025 + kltapmod
ad1         =          0.026 + krtapmod
ad1         =          delayw
ad1         =          asignal * adanping
aleft       =          asignal + ad1
aright      =          asignal + ad2
outs       =          aleft * adanping, aright * adanping
endin

```

3.3.7 MIDI Performance

You can easily modify your patch in order to play it live with a MIDI controller (Figure 3.2).

1. Add an **msign 1, 6** statement in the orchestra header, to send MIDI channel 1 to Csound instrument 6.
2. Add **--midi-key=4 --midi-velocity=5** to the **<CsOptions>** tag, to send MIDI key and velocity to p elds 4 and 5, respectively.
3. Add a **pset** statement to instrument 6 to set default values for all 5 of your p elds, so that instrument instances triggered by live MIDI events will receive values (otherwise, warning messages about p4 and p5 not being legal for MIDI will print). Such default values can be useful if you use score p elds to set sound-generating parameters in your instruments. In this case, they can all be zeros.

3 Writing Orchestras and Scores

4. You may wish to delete all **i** statements from the **<CsScore>** tag. If you do so, you must add an **f 0 3600** statement, to tell Csound to render without score events for 3600 seconds (of course 3600 can be any value).

```
<CsoundSynthesizer >
<CsOptions >
</CsOptions >
<CsInstruments >
sr          =          88200
ksmps      =          1
nchnls     =          2

          massign      1, 6

gisine     ftgen       0, 0, 65537, 10, 1

          instr       6
          pset       0, 0, 0, 0, 0
ikey       =          p4
ivelocity  =          p5
ioctave    =          ikey / 12 + 3
idb        =          ivelocity / 127 * 84
ifrequency =          cpsoct(ioctave)
iamplitude =          ampdb(idb)
ienvattack =          0.004
ienvdecay  =          0.5
ienvlevel  =          0.25
ienvrelease =          0.05
aenvelope  mkadsr      ienvattack, ienvdecay, ienvlevel, ienvrelease
amodulator poscil      800.0, ifrequency * 7.00, gisine
asignal    poscil      iamplitude, ifrequency + amodulator * aenvelope,
          gisine
asignal    =          asignal * aenvelope
iattack    =          0.0015
irelease   =          0.002
isustain   =          0.002
p3         =          p3
          iattack + isustain + irelease
adanping   linsegr     0.0, iattack, 1.0, isustain, 1.0, irelease, 0.0
krtapmod   poscil      0.002, 1.1, gisine, 0
kltapmod   poscil      0.003, 1, gisine, 0.5
adump      delayr     1.0
ad1        deltapi    0.025 + kltapmod
ad2        deltapi    0.026 + krtapmod
          asignal * adanping
aleft      =          asignal + ad1
aright     =          asignal + ad2
          outs
          aleft * adanping, aright * adanping
          endin
</CsInstruments >
<CsScore >
i 1 1 3 60 100
i 2 ^+4 3 60 100
i 3 ^+4 3 60 100
i 4 ^+4 3 60 100
i 5 ^+4 3 60 100
i 6 ^+4 3 60 100
</CsScore >
</CsoundSynthesizer >
```

Modify the Csound options also:

1. Change the **Output file** to your audio output port (8, in my case).
2. Change the audio sample frame rate to 44100.
3. Set the MIDI port (to 0, in my case).

3.3 Writing Your First Piece

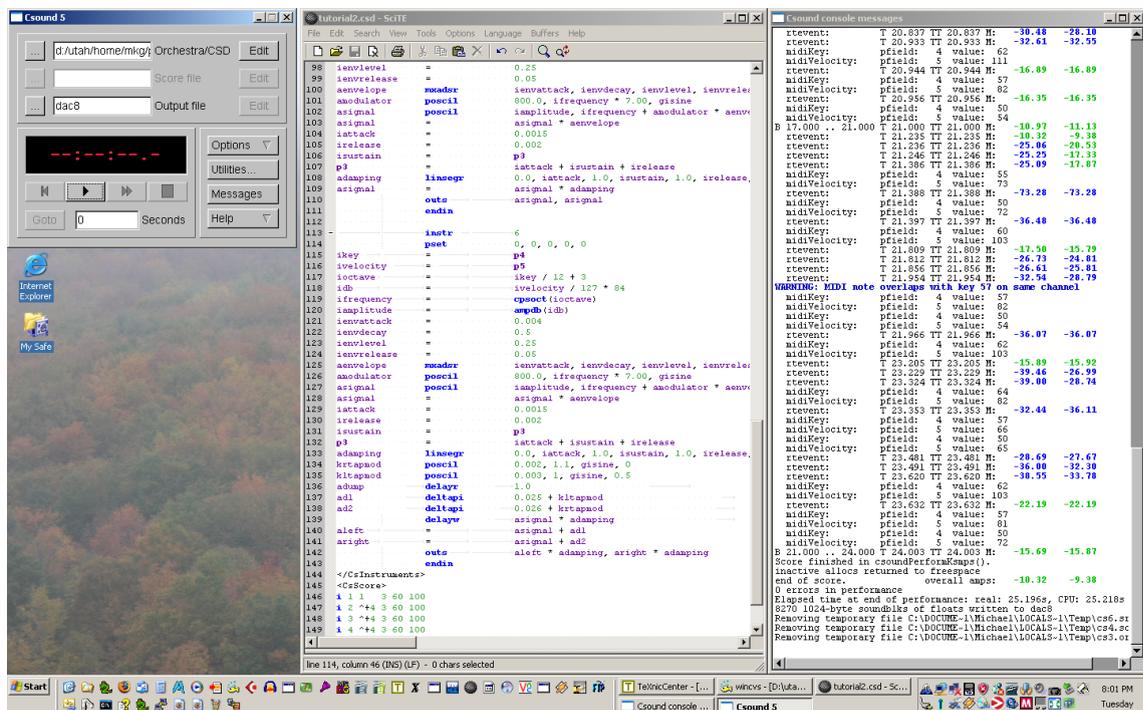


Figure 3.2: Playing `tutorial2.csd` Live

If you plan to do both o -line rendering and live performance, you may wish to standardize some aspects of your instrument definitions:

1. Always use the new MIDI routing args such as `--midi-key` for MIDI input, not the older MIDI opcodes such as `notnum` or even the more recent MIDI interoperability opcodes such as `midinoteonkey`.
2. Always put function table statements in the orchestra header, not in the score; in other words, use `ftgen` instead of `f` statements. If you put function tables in the score, you won't be able to just throw out a score to use an orchestra in live performance.
3. Always specify pitch as MIDI key number.
4. Always specify loudness as MIDI velocity.
5. In fact, always use the same set of standard p fields in all your instruments you may add additional p fields to set sound generating parameters that are specific to an instrument.
6. Always use a `pset` statement to give a default value to each p field, even if it is 0.
7. Always use a releasing envelope generator so that notes will end gracefully during live performance. The names of all the releasing envelope opcodes end with `r`.

3 Writing Orchestras and Scores

8. Worry about sound quality first, and efficiency second. If your computer is having trouble keeping up, you can take a good sounding orchestra and figure out where to substitute more efficient opcodes (**oscil** for **poscil**, for example) much more easily than you can make an orchestra written for efficiency sound good.


This chapter is only a superficial introduction to a very deep topic — some excellent books have been written on it [4, 5, 6].

4 Using CsoundVST

CsoundVST is an extended version of Csound that provides a basic graphical user interface, the ability to run Python programs that can interact with Csound, a variety of Python classes to support algorithmic composition (the Silence system [16]), and the ability to run as a VST instrument (VSTi) or effect plugin in hosts such as Cubase [17]. One reason for doing this is to write pieces for Csound in standard music notation. Another reason is that Csound instruments can easily sound better than most other VSTis, although some Csound orchestras use a lot of CPU time. This chapter shows how to use Csound as a programmable VSTi in Cubase SX 3. Other audio sequencers should follow similar procedures.

4.1 Configuring CsoundVST

The following assumes that you have installed Csound from one of the Windows installers, which include CsoundVST. You must also have installed Python version 2.4 [18], which CsoundVST needs to run. The Windows installer is supposed to configure Python for CsoundVST. To verify that this has actually happened, run the Python editor Idle. From Idle's Run menu, invoke the Python shell. In the Python shell, type `import CsoundVST`. If you don't see an error message, it succeeded. You should see something like Figure 4.1.

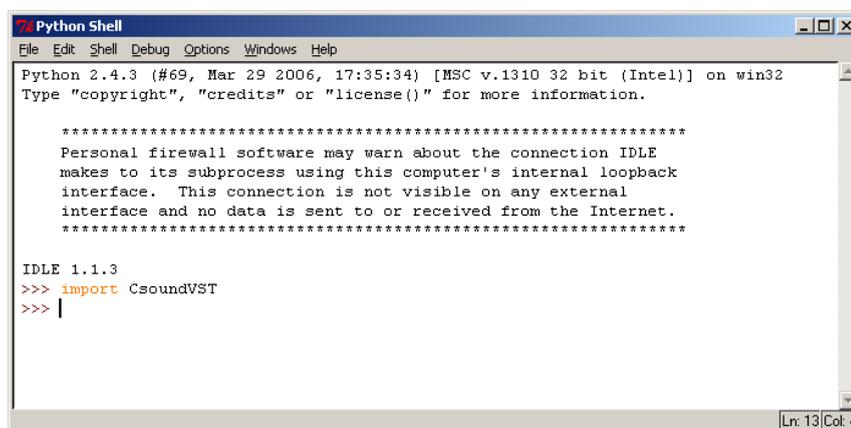

```
Python Shell
File Edit Shell Debug Options Windows Help
Python 2.4.3 (#69, Mar 29 2006, 17:35:34) [MSC v.1310 32 bit (Intel)] on win32
Type "copyright", "credits" or "license()" for more information.

*****
Personal firewall software may warn about the connection IDLE
makes to its subprocess using this computer's internal loopback
interface. This connection is not visible on any external
interface and no data is sent to or received from the Internet.
*****

IDLE 1.1.3
>>> import CsoundVST
>>> |
```

Figure 4.1: Importing CsoundVST

If Python runs, but you see an error message when you try to import CsoundVST, then you need to add the directory where the `_CsoundVST.dll` has been installed, i.e. the `C:/Csound/bin` directory, to your `PYTHONPATH` environment variable.

To configure Cubase for CsoundVST, run Cubase. Use the Devices menu, Plugin information dialog, VST Plug-ins tab. In the Shared VST Plug-ins folders

4 Using CsoundVST

old type the path to **_CsoundVST.dll**, again **;C:/Csound/bin**. Then click on the Add button to append the CsoundVST path to the existing Cubase plugin path (Figure 4.2).

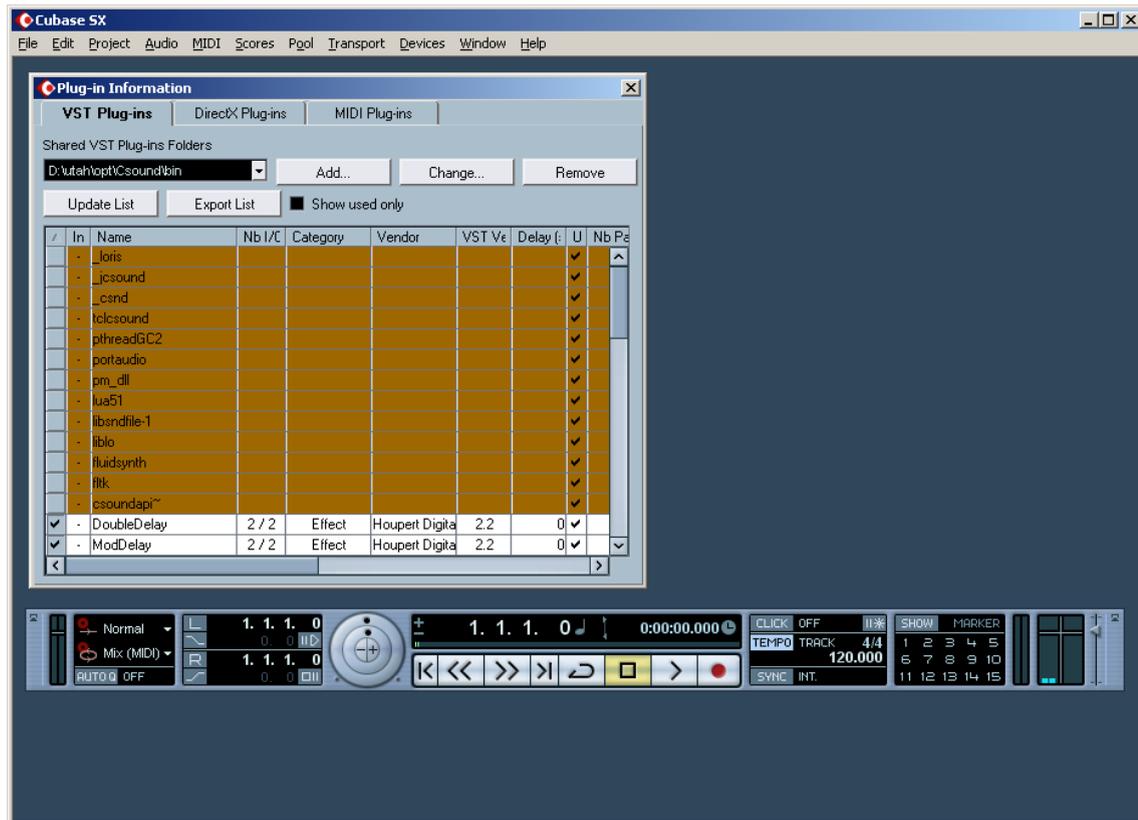


Figure 4.2: CsoundVST Plugin Path

Verify that CsoundVST is now available as follows. Quit Cubase and start it again, and use the Devices menu, VST Instruments dialog to select **_CsoundVST** as a VSTi. After a brief delay for loading, you should see something like Figure 4.3.

If you don't see this, see Footnote 4 about environment variables. Look for a variable named **PYTHONPATH**. If it exists, append **;C:/Csound/bin** to its value. If it does not exist, create it with the value **;C:/Csound/bin**. Then try again.

4.2 Using CsoundVST

In order to use CsoundVST:

1. Begin a Cubase song, and create a MIDI track in it.
2. Create an instance of CsoundVST.
3. Load a Csound orchestra in CsoundVST.
4. Configure the orchestra for VST input and output.

4.2 Using CsoundVST

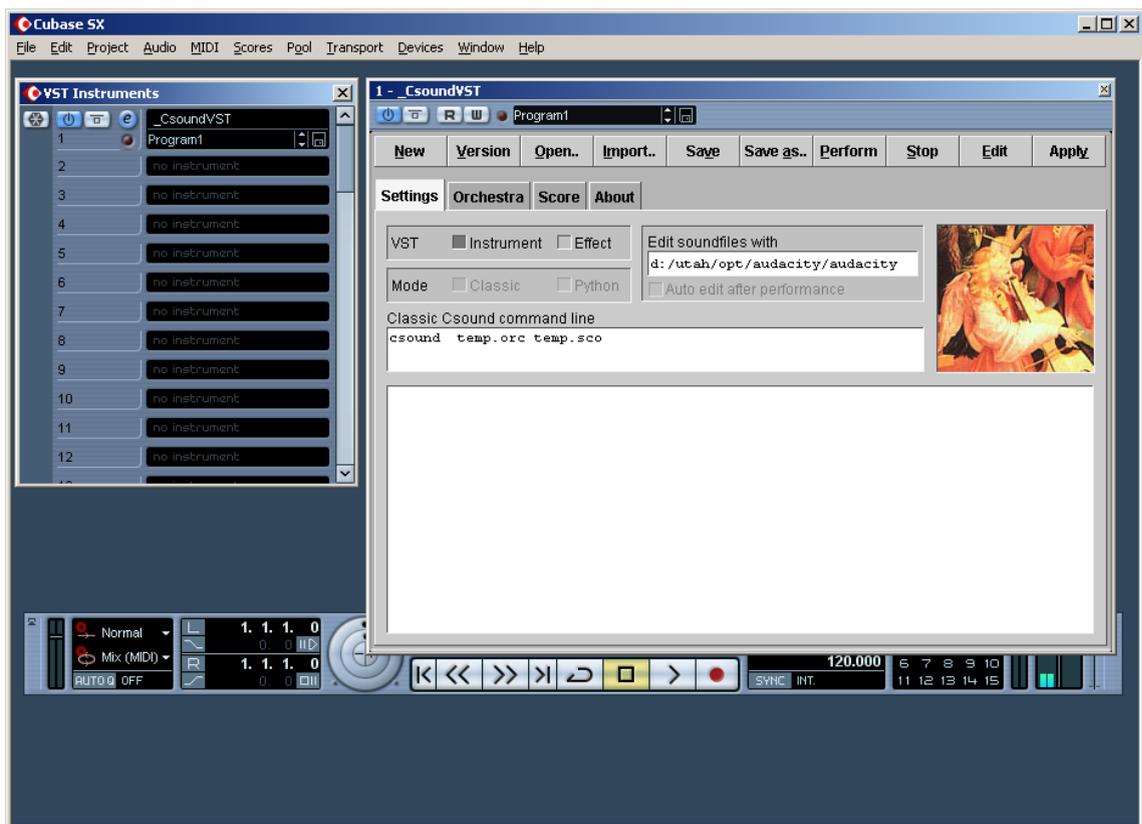


Figure 4.3: CsoundVST Loaded

4 Using CsoundVST

5. Compile the orchestra.
6. Select CsoundVSt as an output for the MIDI track.
7. Assign your track's MIDI channel to a Csound instrument number in your orchestra (in fact, you can create any number of tracks assigned to CsoundVST, and you can also create multiple instances of CsoundVST).
8. Enter some music by playing notes in from a MIDI controller, by importing a MIDI file, by using the piano roll editor, or by writing music notation.

These steps can be carried out as follows.

4.2.1 Create a Cubase Song

Run Cubase, and use the File menu, New item to create a new empty project (Figure 4.4).

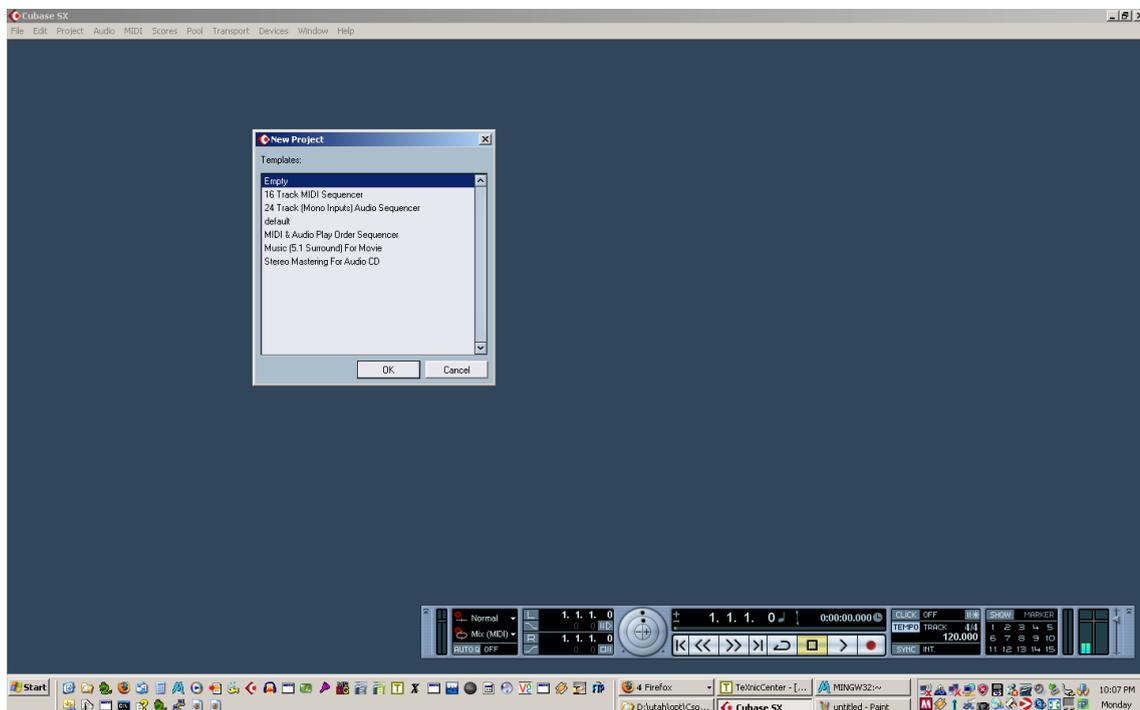


Figure 4.4: Creating a New Project

Use the Project menu to add a new MIDI Track to your song (Figure 4.5).

4.2.2 Create an Instance of CsoundVST

Use the Devices menu, VST Instruments dialog to create a new instance of CsoundVST. Right-click the mouse on an empty field to bring up a context menu listing available VSTis, and select _ CsoundVST. You should now see the CsoundVST GUI in Cubase (Figure 4.6). Make sure that the Instrument checkbox is enabled; if not, enable it, then click on the Apply button to save your preference.

4.2 Using CsoundVST

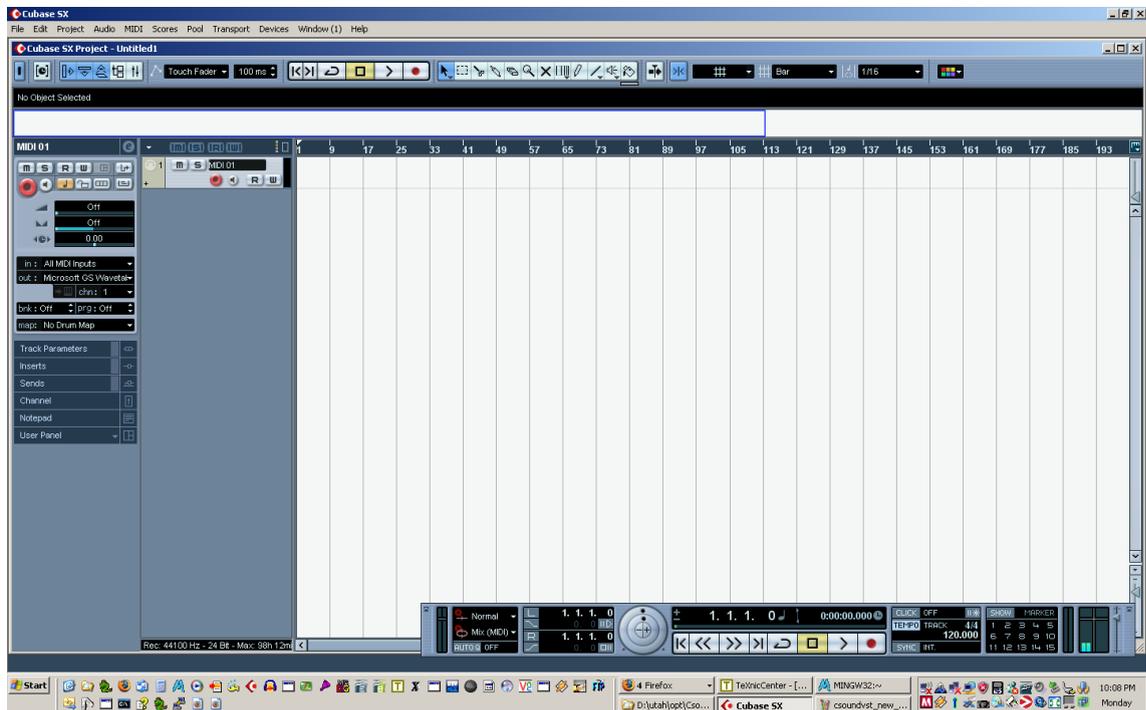


Figure 4.5: Creating a New Track

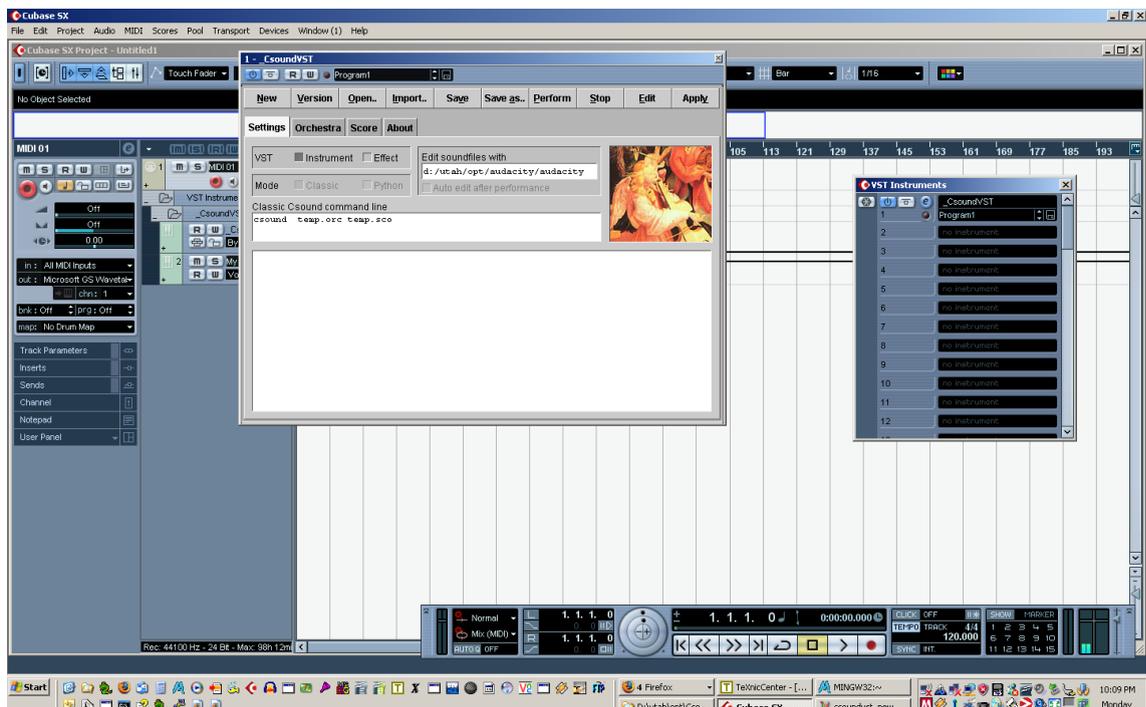


Figure 4.6: Creating a New Instance of CsoundVST

- h** Do not output a sound file header (which might sound like a click), since Csound's audio output is going straight into Cubase.
- +rtmidi=null** Required. Use a dummy MIDI driver. CsoundVST's code inserts the parts of a MIDI driver into Csound that CsoundVST requires to receive MIDI from the VST host.
- M** Required. Receive MIDI from port 0 (again, this is a dummy that simply enables Csound to receive MIDI events).
- mid-key-oct=4** Required. Send MIDI note on message key numbers as linear octaves to p field 4 of the Csound instruments in the orchestra.
- mid-velocity=5** Required. Send MIDI velocity key numbers to p field 5 of the Csound instruments in the orchestra.
- d** Required. Display no graphs of wavetables.
- n** Required. Do not send any audio output to actual audio devices or sound files. CsoundVST copies audio straight out of the internal buffers of Csound into the host buffers.
- temp.orc** Required. CsoundVST stores the Csound orchestra internally in its VST patch. But to perform the score, Csound must automatically export the orchestra using this filename.
- temp.sco** Required. CsoundVST stores the Csound score internally in its VST patch. But to perform the score, Csound must automatically export the score using this filename.

When you have created your options, you must make sure that your edits are saved with the Cubase File menu, Save command.

4.2.5 Compile the Orchestra

Before you can play an orchestra, it must be compiled. In Cubase, you activate a VST plugin by clicking on the on/off button (it will light up) that is found on the upper left hand corner of the VST instrument GUI, or also on the MIDI track channel settings. You de-activate the plugin by clicking again on the on/off button (it will go dark). When CsoundVST is activated, it exports its stored orchestra and score, compiles them, and performs them; they are then ready to receive MIDI input from Cubase. When CsoundVST is de-activated, it stops performing.

Note: when Cubase loads a song containing CsoundVST, Cubase will automatically activate CsoundVST. This can cause a delay as the orchestra compiles.

As the orchestra compiles, which normally takes a second or so, Csound will print informational messages to the message text area at the bottom of the Settings tab. When the messages stop scrolling, compilation is complete (Figure 4.8).

4 Using CsoundVST

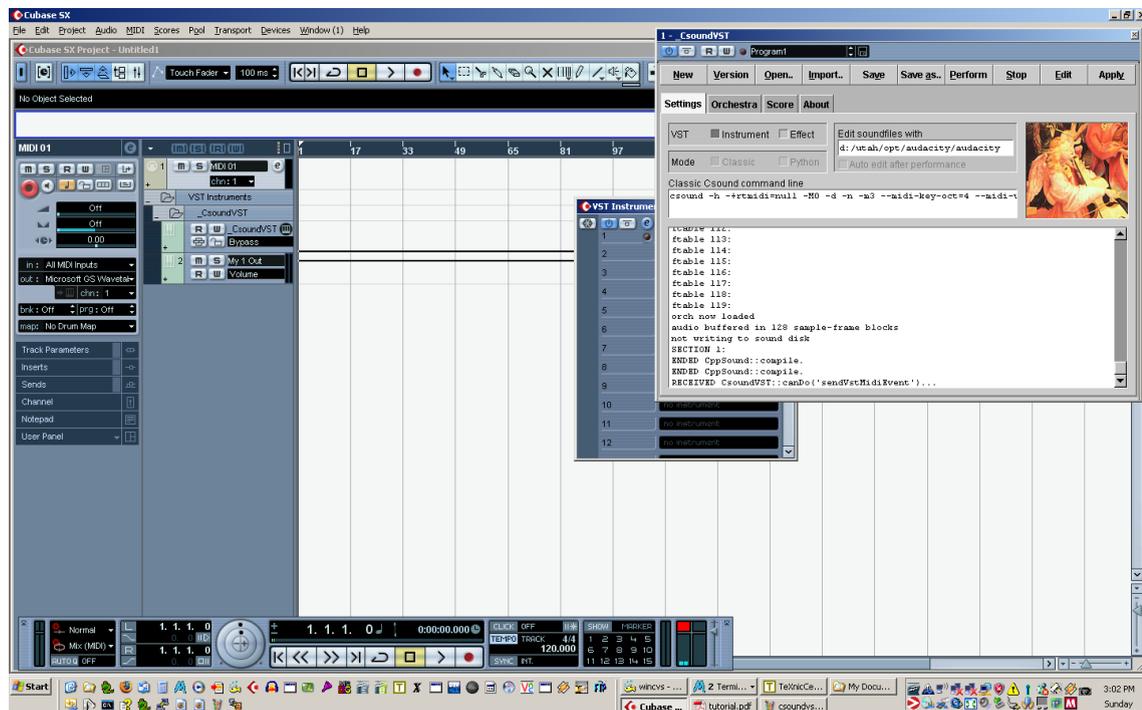


Figure 4.8: Compiled Orchestra

4.2.6 Track Setup

Before you can actually get any sound out of CsoundVST, you must select it as an output in your MIDI track. In the Track panel, out field, use the left mouse button to pop up a list of available outputs. If it has been activated, **_CsoundVST** should be one of these. Select it.

4.2.7 MIDI Channel Setup

Now, assign your MIDI track's channel number. The orchestra contains many more than 16 instruments, but you can assign MIDI channels to instruments numbered higher than 16 by using the **massign** statement in the Csound orchestra header.

Create a part in your MIDI track, set up a loop for the part, use the Track panel's chn field to assign your track's MIDI channel to a number between 1 and 16, inclusive.

Start recording, and play some notes on your MIDI controller. If notes begin appearing in your part, you know your MIDI interface is working. You may hear nothing at all, or you may hear a loud distorted sound. Use the VST instrument volume control to adjust the gain, if necessary (Figure 4.9). If you still hear nothing, check the Csound messages pane, and re-activate Csound if necessary.

If you make any changes to the Csound orchestra, be sure you use the Cubase File menu, Save command to save your edits. These edits are saved inside the Cubase song (.cpr) file, not to the Csound orchestra that you originally exported, although you can re-export the .csd file if you wish.

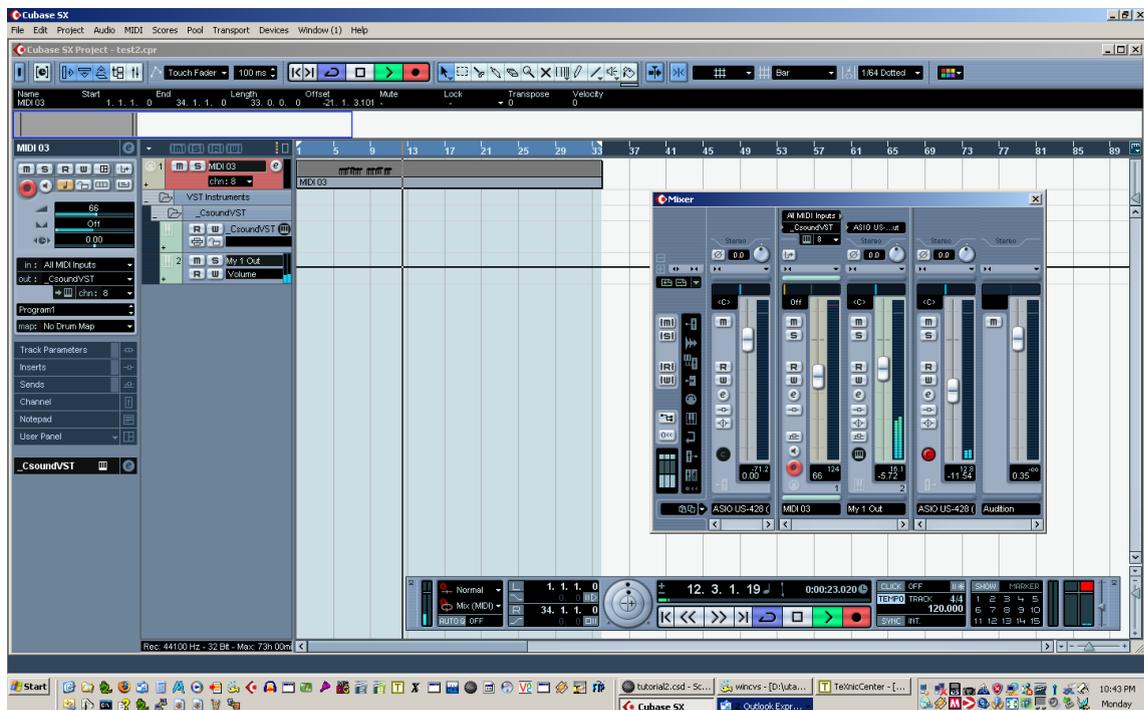


Figure 4.9: Channel Setup

4.2.8 Write Some Music

There are of course many ways to write music with CsoundVST in Cubase, or any other VST-enabled audio sequencer or notation software. You can play in tracks, write music notation, type in event lists, and so on. Figure 4.10 shows CsoundVST rendering a Buxtehude fugue that has been imported from a public domain MIDI file. Note that a single instance of Csound is being used to render all 6 tracks, each of which may play 1, 2, or more voices. Each track is assigned to a different MIDI channel, which in turn is assigned to a different instrument number in the **CsoundVST.csd** orchestra.

Although in this piece the CPU load (as shown by the leftmost vertical meter on the transport bar) is light, it is easy to create instruments and effects in Csound that use a lot of CPU cycles. In such cases, you can use Cubase's own offline rendering facility, or you can render one track at a time by soloing it and freezing it.

4 Using CsoundVST

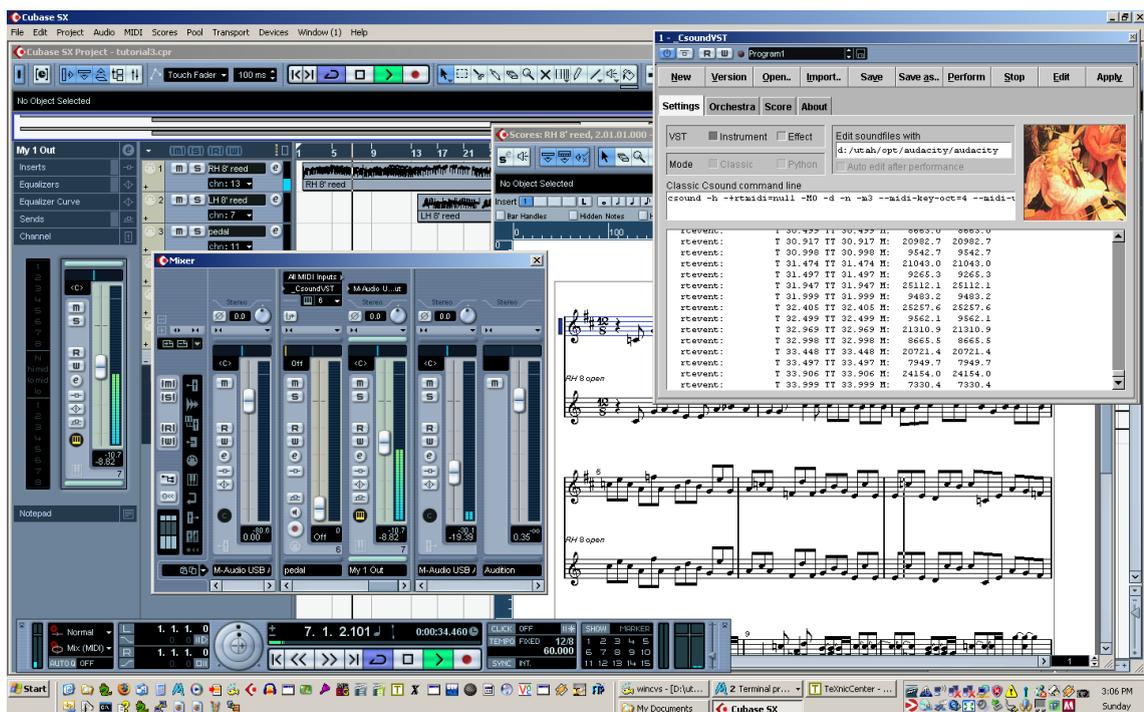


Figure 4.10: Scoring with Csound

5 Python Scripting

There may be thousands or even hundreds of thousands of notes in a single piece of music. Consequently, most musicians do not compose pieces for Csound by typing in one note at a time.

The commonest way of writing Csound scores is to write programs to generate scores. This is called **generative music** or **algorithmic composition**. This, again, is a very deep subject [19, 20, 21, 22].

Of course, if you are the kind of a composer who hears music in his or her head and you just need to get the notes you hear into Csound, you can use Sibelius, export a MIDI file, and have Csound perform your MIDI file using the `--midi file` option:

```
csound --midi-key=4 --midi-velocity=5 --midifile mypiece.mid -Rvzfo myrendering.wav
```

On the other hand, if you are such a composer and you have some facility with programming, it is probably just as easy to write snippets of code to generate runs, chord progressions, minimalist-style cells, and so on. In other words, a programming language is just another form of music notation. For some purposes, code is a better form of notation. More significantly, composing by programming opens up vast new musical possibilities:

- You can compose things that transcend the limits of your imagination.
- If you have composed something that transcends the limits of your imagination but you don't like it, you can change the code until you do like it — sometimes.
- With recursive or fractal algorithms, a single change in the code can have global effects on the piece, at every level of structure at the same time.
- You can compose things that are too tedious to notate by hand, or too precise for performers to play.

In my view, this is the outstanding reason to use Csound — it is an ideal orchestra for algorithmic composition.

Score generators have been written in many languages. But some languages can operate Csound directly. At the time of writing, these include C [3], C++ [23], Java [24], Lisp [25], Lua [26], and Python [18]. This chapter is about using Python.

Python is an open source, dynamic, high-level, object-oriented programming language with some features of functional programming. Python is widely used, and there is a huge number of libraries available for it, including libraries for scientific computing that turn out to be very useful for computer music. Of all the languages I have used, both in my career as a programmer and in my career as an algorithmic composer, Python has been by far the easiest and most productive language to learn and to use.

5 Python Scripting

The remainder of this chapter assumes that you have at least some experience with Python. If not, running through the Python tutorial at the beginning of the Python manual should be enough to get you started [27].

Csound comes with not just one but two Python interfaces:

csnd This is a Python interface to the complete Csound API, also including facilities for loading Csound **.csd**, **.orc**, and **.sco** les, and for building up **.sco** les in memory one statement at a time — very useful for score generation.

CsoundVST Includes everything in **csnd**, plus my Silence system [16] for algorithmic composition based on music graphs, which represent scores as hierarchical structures in somewhat the same way that a ray tracer represents a visual image as a hierarchical scene graph.

This tutorial uses **csnd**. First we use it simply to run an existing piece — the **tutorial2.csd** piece from Chapter 3. Then we use Python to generate a piece using a Koch curve, in which each segment of a curve is replaced by a generator curve [28]. We use an existing Csound orchestra to render the piece we have generated. Finally, we experiment with changing the parameters of the compositional algorithm.

5.1 Running Csound from Python

1. Run Idle, the Python editor that comes with Python.
2. Create a Python file, **tutorial4.py**.
3. Import **csnd**. To verify that the import succeeded, print a directory of the **csnd** module, which should list all the API functions and constants in the module.
4. Create an instance of **csnd.CppCsound**, which is the Python interface to the high-level Csound C++ class that has facilities for managing Csound files, as well as the rest of the standard Csound API.
5. Enable Python to print Csound messages by calling **csound.setPythonMessageCallback()**.
6. Load the **tutorial2.csd** piece.
7. Set the Csound command-line options. Note that the command must be completely spelled out, as if you were entering it on the command line, including **csound** and the names of the **.orc** and **.sco** les.
8. Print out the loaded and modified **.csd** file by calling **print csound.getText()**.
9. Render the piece by calling **csound.perform()**. You should see the Csound messages printing out in the Idle Python Shell window.

This is illustrated in Listing 5.1 and Figure 5.1.

Listing 5.1: Running Csound with Python

```

# Import the Csound API extension module.

import csnd

# Print a directory of its attributes
# (variables, functions, and classes)
# to verify that it was properly imported.

print dir(csnd)

# Create an instance of Csound.

csound = csnd.CppSound()

# Enable Csound to print console messages
# to the Python console.

csound.setPythonMessageCallback()

# Load the tutorial2 piece created earlier.

csound.load('tutorial2.csd')

# Set the Csound command for off-line rendering.

csound.setCommand('csound -RWfo tutorial4.py.wav temp.orc temp.sco')

# Print the complete .csd file.

print csound.getCSD()

# Export the .orc and .sco file for performance.

csound.exportForPerformance()

# Actually run the performance.

csound.perform()

```

5.2 Generating a Score

In Csound, a score is basically a list of **i** statements, each with its own list of p elds. This tutorial has always used the same layout of p elds. This has advantages for algorithmic composition. It makes it easy to build up scores algorithmically.

A sample piece is shown in Listing 5.2. To understand what is happening, read the comments in the code.

Some of the important points are as follows. The score generator is written as a Python class, and an instance of Csound is created as a class member. After generating the score, the code appends an **e** (end) statement to the score, which turns o the reverb instrument and other e ects that are running on the **CsoundVST.csd** orchestra's mixer buss with indefinite durations. The code tests to see if it is running as **__main__**, in which case a score is generated (as in this case), or whether it is running because it was imported by another module, in which case no score is generated. The other module can then initialize the generator, derive other classes from it, and otherwise use **tutorial5.py** as a class library.

Listing 5.2: Koch Curve Score Generator

```

import csnd

```

5 Python Scripting

```

Tutorial4.py - D:\olaf\home\mkg\projects\csound\tutorial\tutorial4.py
import csnd
print dir(csnd)
csound = csnd.CppSound()
csound.load('tutorial2.csd')
csound.setCommand('csound -Rfio test.wav temp.orc temp.sco')
print csound.getCSP()
csound.exportForPerformance()
csound.setPythonMessageCallback()
csound.perform()

Python Shell
138 lines read
instr 1
instr 2
instr 3
instr 4
instr 5
instr 6
Elapsed time at end of orchestra compile: real: 0.051s, CPU: 0.047s
sorting score ...
.. done
Elapsed time at end of score sort: real: 0.068s, CPU: 0.063s
Csound version 5.03.0 beta (double samples) Jul 31 2006
displays suppressed
PSET: isno=6, pmax=5
..0.000000...0.000000...0.000000...0.000000...0.000000..
Odbfs level = 32768.0
chnl 1 using instr 6
ftable 101:
orch now loaded
audio buffered in 128 sample-frame blocks
writing 1024-byte blks of floats to test.wav (WAV)
SECTION 1:
ENDED CppSound::compile.
B 0.000 .. 1.000 T 1.000 TT 1.000 M: 0.0 0.0
new alloc for instr 1:
B 1.000 .. 5.000 T 5.000 TT 5.000 M: 2028.1 2028.1
new alloc for instr 2:
B 5.000 .. 9.000 T 9.000 TT 9.000 M: 2028.1 2028.1
new alloc for instr 3:
B 9.000 .. 13.000 T 13.000 TT 13.000 M: 2023.7 2023.7
new alloc for instr 4:
B 13.000 .. 17.000 T 17.000 TT 17.000 M: 2025.1 2025.1
new alloc for instr 5:
B 17.000 .. 21.000 T 21.000 TT 21.000 M: 2024.9 2024.9
new alloc for instr 6:
nxtopds = 01019338 opdelim = 0101A2D8
B 21.000 .. 24.000 T 24.003 TT 24.003 M: 3349.8 3878.3
B 24.000 .. 24.054 T 24.054 TT 24.054 M: 294.0 575.3
Score finished in csoundPerformKmps().
inactive allocs returned to freespace
end of score. overall omps: 3349.8 3878.3
0 errors in performance
Elapsed time at end of performance: real: 1.406s, CPU: 1.407s
16575 1024-byte soundblks of floats written to test.wav (WAV)
Removing temporary file C:\DOCUME~1\Michael\LOCALS~1\Temp\cs2.srt ...
Elapsed time = 1.688000 seconds.
ENDED CppSound::perform.
>>>
  
```

Figure 5.1: Running Csound with Python in Idle

```

# Class to represent transforming a note
# by modifying an implicit initial note,
# creating a duration, adding or subtracting pitch,
# adding or subtracting loudness.

class Transform(object):
    def __init__(self, duration, deltaKey, deltaVelocity):
        self.duration = duration
        self.deltaKey = deltaKey
        self.deltaVelocity = deltaVelocity
        self.normalizedDuration = 1.0

# Class for generating a piece using a long initial note
# and a set of transforms, recursively layering atop generated notes.

class Generator(object):
    def __init__(self):
        # Create an instance of CppSound for rendering.
        self.csound = csnd.CppSound()
        self.csound.setPythonMessageCallback()
        self.csound.load('../examples/CsoundVST.csd')
        # To contain a list of transforms.
        self.transforms = []
        # Assign instruments to levels (level:instrument)
        self.arrangement = {0:12, 1:4, 2:21, 3:7, 4:37}
        # Assign gains to levels (level:gain)
        self.gains = {0:1.5, 1:1.25, 2:1, 3:1, 4:1}
        # Assign pans to levels (level:pan)
        self.pans = {0:0, 1:-.75, 2:.75, 3:-.5, 4:.5, 5:-.25, 6:.25}
    def addTransform(self, deltaTime, deltaKey, deltaVelocity):
        self.transforms.append(Transform(deltaTime, deltaKey, deltaVelocity))
        self.normalize()
    def normalize(self):
        sum = 0.0
        for transform in self.transforms:
  
```

```

        sum = sum + transform duration
    for transform in self.transforms:
        transform normalizedDuration = transform duration / sum
# Generate a score in the form of a Koch curve.
# Each note in a generating motive
# will get a smaller copy of the motive nested atop it,
# and so on.
def generate(self, level, levels, initialTime, totalDuration, initialKey,
            initialVelocity):
    # If the bottom level has already been reached,
    # return without further recursion.
    if level >= levels:
        return
    time = initialTime
    key = initialKey
    velocity = initialVelocity
    for transform in self.transforms:
        instrument = self.arrangement[level]
        duration = totalDuration * transform normalizedDuration
        key = key + transform deltaKey
        velocity = velocity + (transform deltaVelocity * self.gains
                               [level])
        phase = 0
        pan = self.pans[level]
        print "%2d: %2d %9.3f %9.3f %9.3f %9.3f %9.3f" % (
            level, instrument, time, duration, key, velocity, phase
            , pan)
        self.csound.addNote(instrument, time, duration, key,
                             velocity, pan)
        # Recurse to the next level.
        self.generate(level + 1, levels, time, duration, key,
                      velocity)
        time = time + duration
# Render the generated score.
def render(self):
    # Ends indefinitely playing effects on the mixer buss.
    self.csound.addScoreLine("e 2")
    # Print the generated score for diagnostic purposes.
    print self.csound.getScore()
    # High-resolution rendering.
    self.csound.setCommand('csound -R -W -Z -f -r 88200 -k 88200 -o
        tutorial5.py.wav temp.orc temp.sco')
    self.csound.exportForPerformance()
    self.csound.perform()
    self.csound.removeScore()

# If running stand-alone, generate a piece;
# if imported by another module, do not generate a piece
# (enables the Generator class to be used as a library).
if __name__ == '__main__':

    # Create a generator with four notes
    # in the same interval relationship as B, A, C, H,
    # i.e. Bb, A, C, B,
    # i.e. 0, -1, +3, -1,
    # offset by a tritone.

    generator = Generator()
    generator.addTransform(10, 6 + 0, 0)
    generator.addTransform( 8,  - 1, 3)
    generator.addTransform( 6,  + 3, -2)
    generator.addTransform(12,  - 1, 0)


    # Generate a 5 minute piece.
    generator.generate(0, 3, 0, 300, 38, 84)
    generator.render()

```

Now run the piece. I find that SciTE [14] actually makes a better environment for

5 Python Scripting

Python programming with Csound than Idle (as long as I don't have to do source-level debugging, which SciTE doesn't support), because if you kill Csound while it is running from Idle, Csound often keeps running anyway as a zombie process, whereas if you kill Csound while it is running from SciTE, it really dies and you can start it again. You can use the Tools menu, Go command to run Python on the currently edited `.py` file, and you can use the Tools menu, Stop Executing command to stop Python. Figure 5.2 shows SciTE running the tutorial5.py piece.

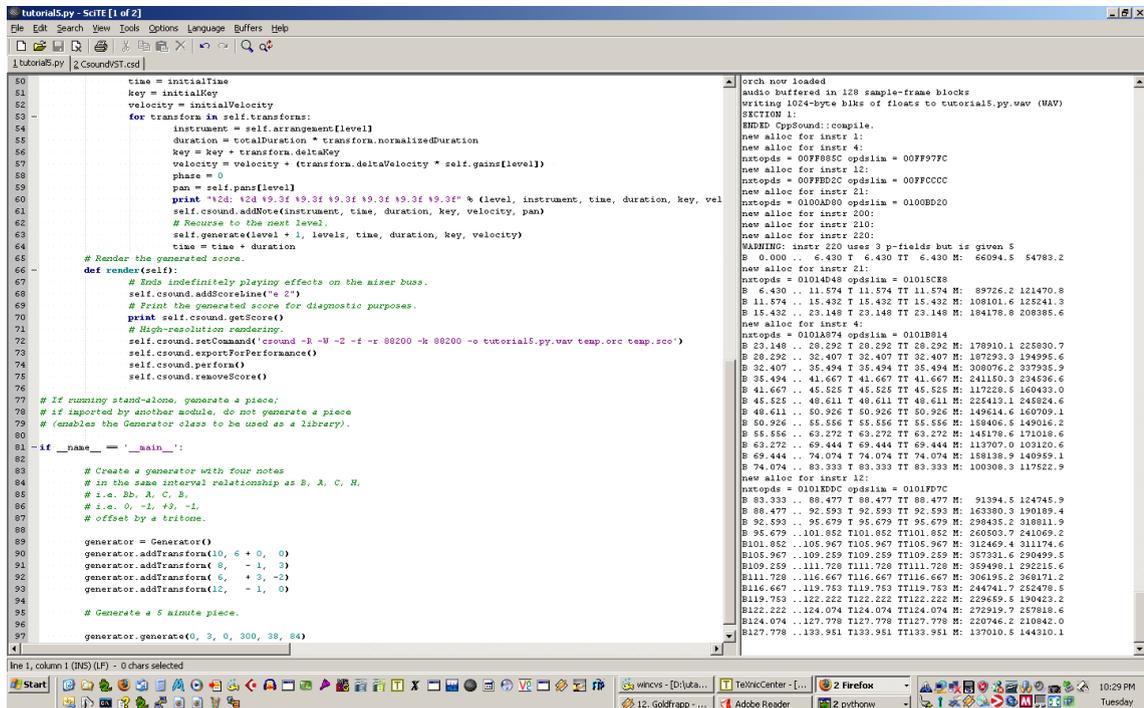

```
113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000
```

Figure 5.2: Running Csound with Python in SciTE

Note also that you can load a Csound orchestra file (**CsoundVST.csd** in this case) into SciTE at the same time as you are editing or running a Python script.

5.3 Varying the Parameters

Once you have rendered this piece, you can experiment with changing the numbers inside the generators, adding and removing segments from the generators, trying more layers, and so on.

For example, try just the following changes: change the number of levels from 3 to 4, and change the second transform's MIDI key movement from -1 to +1. You will see what two small changes do the overall structure of the piece.

A Extra Features and Their Requirements

If you wish to use any of these extra features, you should install the other required software first according to its standard instructions.

ATS opcodes ATS is a library of C and Lisp functions for spectral Analysis, Transformation, and Synthesis of sound based on a sinusoidal plus critical-band noise model. A modeled sound in ATS can be sculpted using a variety of transformation functions. The ATS opcodes in Csound use these transformations, but to use the opcodes, you must install ATS and analyze some sounds [29].

csoundapi~ is an external enabling Csound to run inside Pure Data, another SWSS. To use it, you must install Pure Data [30].

tlcsound is a GUI front end for Csound that use the Tcl/Tk scripting environment. To use tlcsound, you must install Tcl/Tk [31].

VST hosting opcodes enable Csound to use external VST plugins as opcodes. To use them, of course, you must acquire them.

Java API To use this, you must install the Java software development kit (SDK) [24].

Lisp API To use this, you must install the Lisp programming language [25].

Lua API To use this, you do not need to install the Lua programming language it comes in the Windows installer as **luajit.exe**! But, if you do use the Lua API, you may to install various Lua libraries and helpers that you can find starting at <http://www.lua.org>.

Python API to use this, you must install the Python programming language, specifically version 2.4 [18].

A Extra Features and Their Requirements

B Helper Applications

The following is a highly selective subset of the various applications that the Csound community has found helpful for working with Csound. All are cross-platform and should work, at a minimum, on both Windows and Linux. All are freely available, open source applications.

B.1 Audio Editors

You can play Csound files using the media player that comes with your operating system, but a dedicated audio editor is much more useful. It will enable you to see your sound files, edit out clicks, normalize amplitudes, and more.

B.1.1 Audacity

Audacity [15] is the most powerful freely available, cross-platform audio editor. Get it.

B.2 Text Editors

You can edit Csound scores and orchestras with a word processor, but you should find a real programmer's editor much more useful. Each of the following has add-ons for working with Csound files.

B.2.1 Emacs

Emacs [32] has been widely used as a programmer's editor for decades. It has various Csound environments.

B.2.2 SciTE

Not as powerful as Emacs, more user-friendly than vi. SciTE [14] is the editor that I most often use with Csound. You can get a Csound syntax coloring package for SciTE, which can run both Csound and Python from its own shell.

B.3 Composing Environments

A variety of specialized music composition environments have been developed, either specifically for Csound, or that can work with Csound. These are mainly intended for art music and algorithmic composition.

B Helper Applications

B.3.1 athenaCL

Christopher Ariza's athenaCL [33] is a powerful Python-based composing environment that is designed to work with Csound, and which has incorporated within itself many facilities from other earlier composition software. It is designed to be used as an interactive command-line shell, but can also be used as a Python class library.

B.3.2 Blue

Steven Yi's Blue [34], written in Java, provides a visual composing environment for Csound based on time lines. Blue can also run Python scripts.

B.3.3 CsoundVST

CsoundVST, by me, contains a set of classes that implement my idea of music graphs [16]. It is the only composing environment that is distributed with Csound. You must install Python to use the Silence classes. You can write Silence programs either using CsoundVST itself as an editor and Python shell, or from a Python development environment, or from a Python-aware text editor. I use either CsoundVST or SciTE as my main composing environment.

B.3.4 Common Music

Rick Taube's Common Music [35] is a very powerful Lisp-based programming language dedicated to algorithmic composition. It contains facilities for automatically generating Csound scores.

B.3.5 Pure Data

Miller Puckette's Pure Data [30] is, itself, a widely used SWSS. However, it is also used as a composing environment, and it contains a **csoundapi**~ external that can receive events from Pure Data, route them to Csound using the Csound API, and feed audio or events from Csound back into Pure Data.

B.4 Programming Languages

The following programming languages can use Csound through the Csound API. Such languages are especially useful for algorithmic composition.

B.4.1 C/C++

C [3] and C++ [23] are still the standard programming languages for systems programming, i.e. writing the fastest, most complex, and most demanding software. Most operating systems are written in C, and most commercial applications are written in C++ or C. You can use Csound as a synthesis engine in your own C and C++ applications by using the Csound C or C++ APIs, and linking with the Csound library.

B.4.2 Java

Java [24] is another widely used language. It is only about a third as efficient as C or C++, but it is somewhat easier to program. The Csound API has a Java interface.

B.4.3 Lisp

Lisp [25] is the second-oldest (after FORTRAN) high-level programming language. It is particularly noteworthy for being the implementation language for Common Music, an excellent algorithmic composition system that is designed to work with Csound.

B.4.4 Lua

Lua [26] is a lightweight, interpreted high-level language. As it is relatively new, it features a good balance of features from earlier languages. On Windows, there is a just-in-time compiler for Lua that can run Lua programs as fast as compiled Java code (i.e., about 1/3 as fast as C or C++). The Windows installers for Csound actually install not only the Lua interface to the Csound API, but also the Lua just-in-time compiler itself.

B.4.5 Python

Python [18] is my favorite programming language for working with Csound. I find it is easier to read and write than other programming languages, and it has very extensive libraries, e.g. for scientific computing and for computer graphics.

Although Python is an interpreted language and therefore does not run fast, Python can call into precompiled extensions written in C or other efficient languages. The Csound API's Python interfaces are themselves examples of such extensions.

B Helper Applications

C Audio Quality

Currently, studio recording is done to stereo or surround sound (5.1 or 7.1) on computers, hard disk recorders, or professional digital audio tape (DAT) recorders to 24-bit floating-point samples at a rate of 48,000, 88,200, 96,000 or even 192,000 sample frames per second. This is high-resolution audio. At this time, the only consumer electronics formats that can reproduce high-resolution audio are DVD-A and SACD.

CD-quality audio is of distinctly lower resolution: stereo sound with 16 bit integer samples at 44,100 samples per second.

High-resolution audio, on good speakers or earphones, sounds distinctly airy, present, spacious, and undistorted. CD-quality audio, by contrast, can sound flat, shrill, harsh, and flat or boxed in. Usually, this is the result of cumulative mistakes made in this less forgiving medium. CDs actually are precise enough to reproduce most of what we hear. Therefore, CDs made by experts can sound very good indeed, except for their more limited dynamic range and less detailed quiet sounds. Normally, it takes educated ears to hear these differences.

Vinyl records of high quality are not directly comparable to digital recordings. They have their own virtues and flaws. They are more detailed, airy, and spacious than CDs, but can have harmonic distortion, rumbling, hiss, and crackling. In general, well-made records, especially if pressed from direct metal masters, are roughly equal to high-resolution audio in aesthetic quality, even if they are not really as precise.

If you are not used to high-resolution audio, you will need to educate your hearing before you can achieve it (or even hear it). Develop your ears by listening critically to outstanding work on flat, deep, high-resolution audio systems, e.g. real studio monitor speakers or good headphones, at loud but not overwhelming volume in a quiet, sound-adsorbent environment. Listen to your own work in direct comparison. Learn to be objective and to set your own feelings aside, and to hear what others say about your work without getting defensive.

Listen to live orchestral and chamber music, and big-band jazz, from good ensembles, in good halls, from good seats. This is the gold standard for sound. Even high-resolution audio can't touch it. Also listen to outstanding recordings of orchestral, chamber, piano, rock, folk, jazz, New Age, film music (and again, film music) and of course computer music. For computer music, listen to academic computer music, EA, "dance music", mods and demos, and even chip tunes. Each of these genres has something valuable to say about audio beauty and music production quality that is relevant to computer music.

Csound is eminently capable of high-resolution audio. It can render to any number of channels, at any sampling rate, using floating-point samples. Csound also contains high-quality software implementations of all the effects applied by mastering

C Audio Quality

engineers. Therefore, Csound is as good or better than the best studio gear.

If you have a professional or semi-professional audio interface on your computer, you can play high-resolution sound files made with Csound (although you will not hear their full dynamic range unless you have professional gear).

Specific technical advice in decreasing order of importance (all this assumes you don't care how long it takes to render a piece, only if it sounds good):

1. Some of the sounds made by Csound have no counterpart in other kinds of music. They may contain excessive high frequencies, aliasing distortion, or other kinds of noise. On the other hand, the sounds can be of extreme clarity and precision — hyper-real. You need to be constantly aware of what your sounds actually sound like.
2. Always render to floating-point sound files at 88,200 samples per second. You can translate them to 24 bits or to CD quality later if you want, but having the extra precision and dynamic range is vital. There is no audible difference in quality between 88,200 and 96,000 samples per second, but 88,200 can be translated to CD quality by direct downsampling, whereas 96,000 requires fancy filtering and lots of time.
3. If you use sampled sounds, use the best samples you can possibly find. Pay if you must!
4. Also if you use sampled sounds, beware of their own ambience clashing with any reverberation or other ambience you set up using Csound. Samples may also have unwanted noise — it may be possible to de-noise them (Csound has facilities for doing this too).
5. Use a de-clicking envelope to wrap all your instrumental output signals.
6. Watch out for aliasing, which can make sounds buzzy or harsh, in frequency modulation and wavetable oscillators. Aliasing happens when the signal contains frequencies above half the sampling rate (the Nyquist frequency), so that under digital sampling they reflect or fold back under the Nyquist frequency. For so-called analog sounds with simple waveforms such as square or sawtooth waves, use non-aliasing opcodes such as **vco** or **vco2**. You do not need to worry about aliasing with plain sine or cosine waves.
7. For final renderings, always render with **ksmps=1**.
8. Use a-rate variables for envelopes and, in general, wherever opcodes permit. This enables decent results with **ksmps=100** or so.
9. Use only the most precise interpolating oscillators, such as **poscil** or **poscil3**.
10. For wavetable oscillators, the larger the wavetable, the less noisy the signal; 65537 is not too big.

11. Be vigilant for artifacts and noise introduced by various digital signal processing algorithms, especially echoes in reverberation. Don't over-use effects – this is a very common error that you can fix by listening to good examples of studio and live recording.
12. Try rendering with dither (-**Z** option).
13. Experiment with some modest compression, e.g. by using the **compress** or **dam** opcodes.
14. Use the 64-bit sample version of Csound.

C Audio Quality

Bibliography

- [1] Barry Vercoe, John Tch, Istvan Varga, Michael Gogins, et al. Csound. <http://csound.sourceforge.net>. 1
- [2] Max Mathews. The Technology of Computer Music. The MIT Press, Cambridge, Massachusetts, 1969. 1
- [3] Brian W. Kernighan and Dennis M. Ritchie. The C Programming Language. Prentiss-Hall, 2 edition, 1988. 1, 45, 54
- [4] Richard Boulanger, editor. The Csound Book. The MIT Press, Cambridge, Massachusetts, 2000. 1, 34
- [5] Riccardo Bianchini and Alessandro Cipiriani. Virtual Sound: Sound Synthesis and Signal Processing Theory and Practice with Csound. ConTempo, Rome, 1998. English edition (2000), translated by Agostino Di Scipio. 1, 34
- [6] Andrew Horner and Lydia Ayers. Cooking with Csound Part 1: Woodwind and Brass Recipes. A-R Editions, Middletown, Wisconsin, 2002. 1, 34
- [7] James McCartney et al. SuperCollider, 2004. <http://supercollider.sourceforge.net>. 1
- [8] Cycling 74. Max/MSP. <http://www.cycling74.com/products/maxmsp.html>. 1
- [9] Native Instruments. Reaktor 4. <http://www.native-instruments.com> 1
- [10] Barry Vercoe, John Tch, et al. The Canonical Csound Reference Manual, 2006. <http://www.csounds.com/manual>. 1, 10
- [11] Perry R. Cook. Real Sound Synthesis for Interactive Applications. A.K. Peters, Natick, Massachusetts, 2002. <http://ccrma-www.stanford.edu/software/stk> 4
- [12] Kelly Fitz, Lippold Haken, et al. Loris. <http://www.cerl-soundgroup.org/Loris>. 4
- [13] Michael Gogins. Double Blind Listening Tests of Csound 5 Compiled with Single-Precision and Double-Precision Samples, 2006. <http://ruccas.org/pub/Gogins/csoundabx.pdf>. 4
- [14] SciTE: A Free Source Code Editor for Win32 and X, 2006. <http://www.scintilla.org/SciTE.html>. 9, 10, 49, 53

Bibliography

- [15] Audacity. <http://audacity.sourceforge.net>. 10, 53
- [16] Michael Gogins. Music Graphs for Algorithmic Composition and Synthesis with an Extensible Implementation in Java. In Mary Simoni, editor, Proceedings of the 1998 International Computer Music Conference, pages 369–376, San Francisco, California, 1998. International Computer Music Association. 35, 46, 54
- [17] Steinberg Media Technologies GmbH. <http://www.steinberg.net>. 35
- [18] Guido van Rossum. Python, 2006. <http://www.python.org>. 35, 45, 51, 55
- [19] Lejaren Hiller and L.M. Isaacson, editors. Experimental Music: Composition with an Electronic Computer. McGraw Hill, New York, New York, 1959. 45
- [20] Tom Johnson. Self-Similar Melodies. Editions 75, Paris, 1996. 45
- [21] David Cope. The Algorithmic Composer. Number 16 in Computer Music and Digital Audio. A-R Editions, Middleton, Wisconsin, 2000. 45
- [22] Heinrich K. Taube. Notes from the Metalevel. <http://pinhead.msi.c.uiuc.edu/~hkt/mm/>. 45
- [23] Bjarne Stroustrup. The C++ Programming Language, 2006. <http://www.research.att.com/~bs/C++.html>. 45, 54
- [24] Sun Developer Network. The Source for Java Developers, 2006. <http://java.sun.com> 45, 51, 55
- [25] Association of Lisp Users, 2006. <http://www.lisp.org/alu/home>. 45, 51, 55
- [26] Robert Ierusalemichy, Waldemar Celes, and Luiz Henrique de Figueirido. The Programming Language Lua, 2006. <http://www.lua.org>. 45, 55
- [27] Guido van Rossum and Jr. (Ed.) Fred L. Drake. Python Tutorial, 2006. <http://docs.python.org/tut/tut.html>. 46
- [28] Heinz-Otto Peitgen, Hartmut Jürgens, and Dietmar Saupe. Chaos and fractals: New frontiers of science. In Chaos and Fractals: New Frontiers of Science, chapter 5, pages 229–296. Springer-Verlag, 1992. 46
- [29] Juan Pampin, Oscar Pablo Di Liscia, Pete Moss, and Alex Norman. Analysis - Transformation - Synthesis (ATS), 2006. <http://www.dxarts.washington.edu/ats>. 51
- [30] Miller Puckette. Pure Data. <http://puredata.info>. 51, 54
- [31] Tcl Developer Xchange, 2006. <http://www.tcl.tk>. 51
- [32] Richard W. Stallman et al. GNU Emacs, 2006. <http://www.gnu.org/software/emacs/>. 53
- [33] Christopher Ariza. athenaCL. <http://www.flexatone.net/athena.html>. 54

- [34] Steven Yi. blue. <http://csounds.com/stevenyi/blue>. 54
- [35] Rick Taube. Common Music. <http://commonmusic.sourceforge.net/doc>.
54